

Haohui Mechanical & Electrical

- Gasoline engine
- Generator
- Washer
- Water pump
- Sprayer
- Vibrator



Taizhou Haohui Mechanical And Electrical Co., Ltd

台州豪辉机电有限公司

Add: NO.123 of East Haiyuan Road,Taizhou Bay New Area,
Taizhou City,Zhejiang Province,China
地址: 浙江省台州市台州湾新区海源东路123号
Tel/电话: 0086-576-88110186 88110187 88110188 88110189 81833258

Http://www.haohuichina.com

E-mail:haohuiallen@163.com haohuitracy@163.com vickyhaohui@163.com
serenahaohui@163.com haohuiferris@163.com



Products shall be subject to
any changes without
additional notices.



Everybody is responsible
for environmental protection,
sustainable development!

CE CCC ISO9001

台州豪辉机电有限公司
Taizhou Haohui Mechanical And Electrical Co., Ltd

Our Advantages

 Efficient

 Secure

 Environment protecting

60000⁺ 工厂建筑面积达6万平方米
The factory covers an area of 60,000 square meters

1000000⁺ 年生产各类产品能力超100万台
The annual production capacity of various types of pumps exceeds 1,000,000 units

公司坐落于经济发达、交通便捷的沿海开放城市——浙江台州，距机场仅15公里，紧邻甬台温高速、台金高速及台州动车站。
企业总建筑面积达6万平方米，现有员工300余人，其中高级技术人才20多名，是一家集研发、制造、销售于一体的科技型骨干企业。专业从事植保机械、园林机械、汽油机动力、水泵、发电机及清洗机等产品的设计与生产。
公司始终坚持创新引领，持续推进技术升级与品质管理，通过ISO9001:2015、CE、SGS、COC等多项认证。凭借科学的管理体系、先进的生产设备和齐全的产品类别，赢得了国内外客户的广泛认可。产品畅销全国，并远销全球数十个国家和地区。
豪辉机电以高质量产品和完善服务为承诺，诚挚欢迎海内外客商莅临指导、共谋发展！

The company is located in Taizhou, Zhejiang, a coastal open city with developed economy and convenient transportation. It is only 15 kilometers away from the airport and adjacent to Yongtaiwen Expressway, Taijin Expressway and Taizhou High-speed Railway Station.

With a total construction area of 60,000 square meters, the enterprise currently has more than 300 employees, including over 20 senior technical talents. It is a key technology-based enterprise integrating R&D, manufacturing and sales, specializing in the design and production of products such as plant protection machinery, garden machinery, gasoline engine power, water pumps, generators and cleaning machines.

The company has always adhered to innovation-driven development, continuously promoted technological upgrading and quality management, and has obtained multiple certifications including ISO9001:2015, CE, SGS and COC. Relying on a scientific management system, advanced production equipment and a complete range of product categories, it has won wide recognition from customers at home and abroad. Its products are sold well across the country and exported to dozens of countries and regions around the world.

Haohui Electromechanical promises high-quality products and comprehensive services, and sincerely welcomes customers at home and abroad to visit and guide, and seek common development together!



新的荣耀,新的征程 未来绝不止于此

荣耀, 使我远航 GLORY, MAKE ME SAIL

不经艰苦就不知其中艰辛, 不经磨难就得不到成就。荣誉源于用心, 每份认可的资质证书凝聚我们奋力拼搏的结晶, 每份荣誉都是我们的金色名片和通行证, 那是我们一个个路标, 那是我们一次次的历程。

Without hardship, one does not know the hardships involved, without trials, one cannot achieve success. Honor comes from hard work, and each recognized qualification certificate embodies the crystallization of our hard work. Each honor is our golden business card and passport, which are our road signs and our journey time and time again.



豪辉
值得您的信赖
Worthy of your trust.





HT-EY20

Bore×Stroke:67×52mm
Displacement(ml):183
Rated output (kW(HP)/rpm):2.28(3)/3000
Max output(kW(HP)/rpm):2.65(3.5)/3600
Max output(kW(HP)/rpm):3.73(5)/4000
Direction of Rotation:Counterclockwise,facing P.T.O shaft
Fuel:Automobile Gasoline(unleaded)
Fuel tank capacity(L):3.8
Spark Plug:E6TC
Lubricating Oil capacity:0.6L
Ignition system:C.D.I.
Starting system:Recoil start
Packing size:L×H×W(mm):330×330×420
Net Weight(kg):15



HT-EY20K

Bore×Stroke:67×52mm
Displacement(ml):183
Max.Output:4.3(3.2)/4000 kW(HP)/rpm
Rated output:3.1(2.3)/3600 kW(HP)/rpm
Max.Torque:0.82(8.0)/2800
Operation direction of output axis:Counterclockwise power output axis
Fuel:Kerosene(automobile gasoline when starting 90#)
Fuel tank capacity:Kerosene 3.4L,Gasoline 0.17L
Lubricating Oil capacity:0.6L
Ignition system:C.D.I.
Starting system:Recoil start
Packing size(mm):330×330×420
Net weight(kg):15



HT-205

Type:Air-cooled,4-stroke,Gasoline Engine
Suction × Delivery Diameters:50.8 × 50.8(2 × 2 inch)
Lift Head(m):26
Max Delivery Volume(CBM/H):35
Suction Head(m):8
Axle Seal (Mechanical Seal):Ceramic-carbon
Engine:EY-20
Fuel tank capacity(L):3.8
Starting System:Recoil start
Packing size:L×H×W(mm):510×380×415
Net Weight(kg):24



HT-305

Type:Air-cooled,4-stroke,Gasoline Engine
Suction × Delivery Diameters:80 × 80(3 × 3 inch)
Lift Head(m):28
Max Delivery Volume(CBM/H):60
Suction Head(m):8
Axle Seal (Mechanical Seal):Ceramic-carbon
Engine:EY-20
Fuel tank capacity(L):3.8
Starting System:Recoil start
Packing size:L×H×W(mm):510×380×415
Net Weight(kg):26



HT-205K

Pump:HT-205K
Type:Air-cooled,4-stroke,Gasoline Engine
Suction × Delivery Diameters:50.8x50.8(2 × 2 inch)
Lift Head(m):26
Max Delivery Volume(CBM/H):35
Suction Head(m):8
Axle Seal (Mechanical Seal):Ceramic-carbon
Engine:EY-20K
Fuel tank capacity(L):3.8
Starting System:Recoil start
Packing size:L×H×W(mm):510×380×415
Net Weight(kg):24



HT-305K

Pump:HT-305K
Type:Air-cooled,4-stroke,Kerosene & petrol Engine
Suction × Delivery Diameters:80x80(3 × 3 inch)
Lift Head(m):28
Max Delivery Volume(CBM/H):60
Suction Head(m):8
Axle Seal (Mechanical Seal):Ceramic-carbon
Engine:EY-20K
Fuel tank capacity(L):3.8
Starting System:Recoil start
Packing size:L×H×W(mm):510×380×415
Net Weight(kg):26



HT-ZB50A

VIBRATOR
Engine:Gasoline,EY20
Combustion way:Air-cooled,Single cylinder,4-Stroke
Engine Power:Max kW(HP):3.7(5.0)
Packing size:L x H x W(mm):475 × 345 × 475
Weight(kg):24



HT-ZB50

VIBRATOR
Engine:Gasoline,168F-1
Combustion way:Air-cooled,Single cylinder,4-Stroke
Engine Power:Max kW(HP):4.8(6.5)
Packing size:L x H x W(mm):470 × 370 × 407
Weight(kg):22

C-90

Weight:85kg
 Power:Gasoline Engine 5.0HP
 Frequency:4000R.P.M
 Impact Force:15.3KN
 Travel Speed:20-25m/min
 Limited Grade ability:20°C
 Plate Size:55cmx42cm
 Dimension:60cmx47cmx72cm
 Good quality, fully complied with GE, GS Directive
 Conveniently placed handles
 Heavy-duty shock mounts reduce vibration to the upper engine and handle
 Sealed belt cover keeps dirt and rocks out of the belt
 Open design reduces dirt building



C-60

Weight:60kg
 Power:Gasoline Engine 5.0HP
 Frequency:4000R.P.M
 Impact Force:10KN
 Travel Speed:20-25m/min
 Limited Grade ability:20°C
 Plate Size:51cmx35cm
 Dimension:68cmx45cmx60cm
 Good quality, fully complied with GE, GS directive
 Foldable handle for easy transportation and stock (stright handle is also available)
 Open plate providea self cleaning
 Complete sealed belt cover to provent sand and soil in
 Radius base plate for easy access to comers
 Throttle control for easy holding working speed, (Throttle control is available as optional)
 Heavy-duty shock mounts reduce vibration to the upper engine and handle



BPM80

Weight:74kg
 Diameter:800mm
 Driving Speed:50-100R.P.M
 Power:Gasoline Engine 6.5HP
 Blade Dimension :26.5cmx15cm
 Packing Size:85cmx85cmx86cm



BPM100

Weight:76kg
 Diameter:1000mm
 Driving Speed:50-130R.P.M
 Power:Gasoline Engine 5.0HP
 Blade Dimension :35cmx15cm
 Packing Size:103cmx103cmx78cm
 Over-built gearbox assure a superior finish
 Safety designed guardring
 Height adjustable handle, assures operator comfort&easy control



GASOLINE ENGINE

汽油发动机

锐意进取 不断创新

> **ENTERPRISING AND**
INNOVATING AS EVER
CE ISO9001



HT-168F / HT-168F-1 / HT-170F



HT-168FE



HT-168F(1/2R)

Model	HT-168F	HT-168F-1	HT-170F	HT-168FE	HT-168F(1/2R)
Engine type:	Air-cooled;4-stroke;OHV;Single cylinder				
Bore x stroke:	68 × 45mm	68 × 54mm	70 × 56mm	68 × 54mm	68 × 54mm
Displacement:	163cc	196cc	215cc	196cc	196cc
Compression ratio:	8.5:1	8.5:1	8.5:1	8.5:1	8.5:1
Max.power output:	(5.5HP)4.1kW	(6.5HP)4.8kW	(7.5HP)5.5kW	(6.5HP)4.8kW	(6.5HP)4.8kW
Rated power output:	(4.0HP)3.0kW	(5.8HP)4.3kW	(6.7HP)4.9kW	(5.8HP)4.3kW	(5.8HP)4.3kW
Max.torque:	10.8N.m	13.2N.m	13.2N.m	13.2N.m	13.2N.m
Ignition system:	Transistor magneto	Transistor magneto	Transistor magneto	Transistor magneto	Transistor magneto
Starting system:	Recoil	Recoil	Recoil	Electric	Recoil
Engine oil capacity:	0.6L	0.6L	0.6L	0.6L	0.6L
Fuel capacity:	3.6L	3.6L	3.6L	3.6L	3.6L
Min.fuel consumption:	360g/kW/h	360g/kW/h	360g/kW/h	360g/kW/h	360g/kW/h
Crankshaft direction:	left	left	left	left	left
Dimensions(L × W × H)(mm):	385 × 330 × 335	385 × 330 × 335	385 × 330 × 335	430 × 330 × 335	385 × 350 × 335
Net weight:	15kg	15kg	15kg	17kg	16kg

汽油发动机 GASOLINE ENGINE



HT-168A



HT-168J



HT-168B



HT-168C

Model	HT-168A	HT-168J	HT-168B	HT-168C
Engine type:	Air-cooled;4-stroke;OHV;Single cylinder		Air-cooled;4-stroke;OHV;Single cylinder	
Bore x Stroke:	68 × 54mm	68 × 54mm	68 × 54mm	68 × 54mm
Displacement:	196cc	196cc	196cc	196cc
Compression Ratio:	8.5:1	8.5:1	8.5:1	8.5:1
Max. Power Output:	(6.5HP)4.8kW	(6.5HP)4.8kW	(6.5HP)4.8kW	(6.5HP)4.8kW
Max. Torque:	13.2N.m	13.2N.m	13.2N.m	13.2N.m
Starting system:	Recoil	Recoil	Recoil	Recoil
Engine Oil capacity:	0.6L	0.6L	0.6L	0.6L
Fuel capacity:	4.8L	4.8L	3.6L	3.6L
Min. fuel consumption:	360g/kW/h	360g/kW/h	360g/kW/h	360g/kW/h
Crankshaft direction:	left	left	left	left
Dimensions(L × W × H)(mm):	380 × 330 × 350	380 × 310 × 350	380 × 330 × 350	380 × 330 × 350
Net weight:	15kg	15kg	15kg	15kg



HT-168D



HT-168E

DIESEL



HT-168G




HT-168H

Model	HT-168D	HT-168E	HT-168G	HT-168H
Engine type:	Air-cooled;4-stroke;OHV;single Cylinder			
Bore x Stroke:	68 × 54mm	68 × 54mm	68 × 54mm	68 × 54mm
Displacement:	196cc	196cc	196cc	196cc
Compression Ratio:	8.5:1	8.5:1	8.5:1	8.5:1
Max.Power Output:	(6.5HP)4.8kW	(6.5HP)4.8kW	(6.5HP)4.8kW	(6.5HP)4.8kW
Rated Power Output:	(5.8HP)4.3kW	(5.8HP)4.3kW	(5.8HP)4.3kW	(5.8HP)4.3kW
Max.Torque:	13.2N.m	13.2N.m	13.2N.m	13.2N.m
Ignition System:	Transistor magneto	Transistor magneto	Transistor magneto	Transistor magneto
Starting system:	Manual	Manual	Manual/Electric	Manual
Engine Oil capacity:	0.6Liters	0.6Liters	0.6Liters	0.6Liters
Fuel capacity:	3.6Liters	3.6Liters	Diesel 4.0L	3.6Liters
Min.fuel consumption:	360g/kW/h	360g/kW/h	360g/kW/h	360g/kW/h
Crankshaft direction:	Left	Left	Left	Left
Dimensions(L × W × H)(mm):	385 × 330 × 335	385 × 330 × 335	395 × 305 × 360	385 × 330 × 335
Net weight:	15kg	15kg	12.5kg	15kg



HT-H168

Engine type: Air-cooled;4-stroke;OHV;single Cylinder
Bore x Stroke: 68 × 54mm
Displacement: 196cc
Starting system: Recoil/Electric
Engine Oil capacity: 0.6Liters
Crankshaft direction: Left
Dimensions: L×H×W(mm): 380 × 330 × 250
Net weight: 13kg

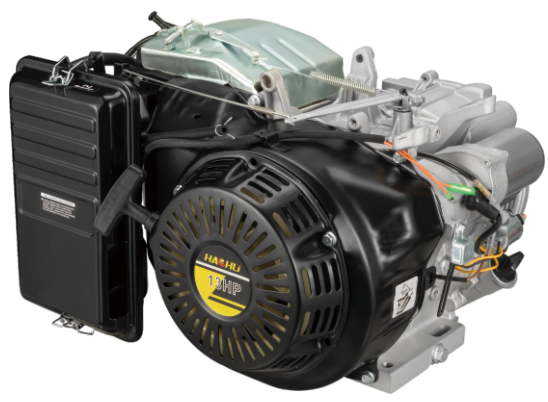

HT-H188

Engine type: Air-cooled;4-stroke;OHV;single Cylinder
Bore x Stroke: 88 × 64mm
Displacement: 389cc
Starting system: Recoil/Electric
Engine Oil capacity: 1.1Liters
Crankshaft direction: Left
Dimensions: L×H×W(mm): 480 × 380 × 300
Net weight: 27kg

Model	HT-177F	HT-188F	HT-190F	HT-192F
Engine type:	Air-cooled;4-stroke;OHV;single Cylinder			
Bore x Stroke:	77 × 58mm	88 × 64mm	90 × 74mm	92 × 74mm
Displacement:	270cc	389cc	420cc	440cc
Compression Ratio:	8.5:1	8.5:1	8.5:1	8.5:1
Max.Power Output:	(9.0HP)6.3kW	(13.0HP)9.1kW	(15.0HP)10.5kW	(17.0HP)11.2kW
Rated Power Output:	(7.6HP)5.3kW	(11.5HP)8.1kW	(13.5HP)9.5kW	(15.8HP)10.2kW
Max.Torque:	26.5N.m	26.5N.m	26.5N.m	26.5N.m
Ignition System:	Transistor magneto			
Starting system:	Recoil/Electric			
Engine Oil capacity:	1.1Liters	1.1Liters	1.1Liters	1.1Liters
Fuel capacity:	6.5Liters	6.5Liters	6.5Liters	6.5Liters
Min.fuel consumption:	325g/kW/h	325g/kW/h	325g/kW/h	325g/kW/h
Crankshaft direction:	Left	Left	Left	Left
Dimensions(L × W × H)(mm):	510 × 415 × 450	510 × 415 × 470	510 × 415 × 470	510 × 415 × 470
Net weight:	25kg	28kg	28kg	28kg



GASOLINE WATER PUMP

汽油机水泵

锐意进取 不断创新

> **ENTERPRISING AND**
INNOVATING AS EVER
CE ISO9001



HT-WP60

KEROSENE



HT-WP20K/WP30K

LPG



HT-GAS20/GAS30

型号 Model	HT-WP60	HT-WP20K	HT-WP30K	HT-GAS20	HT-GAS30
进出水口径 Inlet/Outlet dia.(mm)	150mm(6")	50mm(2")	80mm(3")	50mm(2")	80mm(3")
扬程 Lift(m)	20	26	25	26	25
吸程 Suction Height(m)	7	8	8	8	8
流量 Rate of Flow(m³/h)	180	30	55	30	55
发动机型号 Engine Model	HT-190F	HT-168FK	HT-168FK	HT-168GAS	HT-168GAS
油箱容量 Fuel tank capacity(L)	6.5	3.6	3.6	3.6	3.6
外箱尺寸 Dimension(mm)	710 × 480 × 635	480 × 380 × 395	500 × 380 × 415	480 × 390 × 395	500 × 390 × 415
净重 Net Weight(kg)	61	22	24	22	24



HT-WP20



HT-WP30



HT-WP40(170)



HT-WP40(188)

Model	HT-WP20	HT-WP30	HT-WP40(170)	HT-WP40(188)
进出水口径 Inlet/Outlet dia.(mm)	50mm(2")	80mm(3")	100mm(4")	100mm(4")
扬程 Lift(m)	26	25	25	25
吸程 Suction Height(m)	8	8	8	8
流量 Rate of Flow(m³/h)	30	55	80	80
发动机型号 Engine Model	HT-168F-1	HT-168F-1	HT-170F	HT-188F
油箱容量 Fuel tank capacity(L)	3.6	3.6	4	6.5
外箱尺寸 Dimension(mm)	480 × 380 × 395	500 × 380 × 415	530 × 410 × 510	620 × 490 × 530
净重 Net Weight(kg)	20	21	28	49



HT-HH50



HT-HH80



HT-P20



HT-P30

Model	HT-HH50	HT-HH80	HT-P20	HT-P30
发动机型号 Motor	HT-168F-1	HT-188F	HT-168F-1	HT-168F-1
排量 Displacement	196cc	389cc	196cc	196cc
进出水管口径 Inlet/Outlet dia.(mm)	50(2")	80(3")	50(2")	80(3")
扬程 Lift(m)	68	67	26	25
吸程 Suction Height(m)	7	7	8	8
流量 Rate of Flow(m³/h)	30	60	30	55
净重 Net Weight(kg)	24	49	20	21
外箱尺寸 Dimension(mm)	480 × 400 × 395	560 × 485 × 535	480 × 380 × 395	500 × 380 × 415



HT-TT50



HT-TT80



HT-20H



HT-30H

Model	HT-TT50	HT-TT80	HT-20H	HT-30H
发动机型号 Motor	HT-168F-1	HT-188F	HT-168F-1	HT-168F-1
排量 Displacement	196cc	389cc	196cc	196cc
进出水管口径 Inlet/Outlet dia.(mm)	50(2")	80(3")	65(2.5")/50(2")	80(3")
扬程 Lift(m)	63	65	60	30
吸程 Suction Height(m)	7	7	7	7
流量 Rate of Flow(m³/h)	22	40	35	40
净重 Net Weight(kg)	27	42	23	24
外箱尺寸 Dimension(mm)	510 × 385 × 420	720 × 525 × 630	480 × 380 × 395	500 × 380 × 415



HT-20A

High-lift pump



HT-30A

High-lift pump



HT-D20/D30



HT-N20/N30

Model	HT-20A	HT-30A	HT-D20	HT-D30	HT-N20	HT-N30
发动机型号 Motor	HT-168F-1	HT-190F	HT-168F-1	HT-168F-1	HT-168F-1	HT-168F-1
排量 Displacement	196cc	420cc	196cc	196cc	196cc	196cc
进水管口径 Inlet/Outlet dia.(mm)	50mm(2")	80mm(3")	50(2")	80(3")	50(2")	80(3")
扬程 Lift(m)	60/80	93	26	25	26	25
吸程 Suction Height(m)	8	7	8	8	7	7
流量 Rate of Flow(m³/h)	32/23	30	30	55	22	40
净重 Net Weight(kg)	27	40	24.9	26.2	20.5	21.5
外箱尺寸 Dimension(mm)	500×380×415	630×490×530	480×380×395	500×380×415	550×395×500	560×410×495



HT-20C/30C

Chemical pump



HT-80S

Sewage pump



HT-WP10



HT-WP15

Model	HT-20C	HT-30C	HT-80S	HT-WP10	HT-WP15
进出水口径 Inlet/Outlet dia.(mm)	50(2")	80mm(3")	80mm(3")	25.4(1")	40(1.5")
扬程 Lift(m)	30	25	25	25	25
吸程 Suction Height(m)	7	7	7	7	7
流量 Rate of Flow(m³/h)	35	45	45	25	40
发动机型号 Engine Model	HT-168F-1	HT-168F-1	HT-168F-1	1E40F-6	1E40F-5
油箱容量 Fuel tank capacity(L)	3.6	3.6	196cc	41.5cc	42.7cc
外箱尺寸 Dimension(mm)	555×390×425	570×400×425	555×455×440	480×305×380	480×305×380
净重 Net Weight(kg)	22	28	28	8.5	10

ELECTRIC / SOLAR WATER PUMP 电动/太阳能水泵

锐意进取 不断创新

ENTERPRISING AND
INNOVATING AS EVER
CE ISO9001



HT-E20



HT-E30




HT-20SOLAR



HT-30SOLAR

型号 Model	HT-E20	HT-E30	HT-20SOLAR	HT-30SOLAR
进出水口径 Inlet/Outlet dia.	50mm	80mm	50mm	80mm
流量 Rate of Flow	25L/min	50L/min	25m³/h	40m³/h
扬程 Lift	28m	28m	13m	10m
吸程 Suction Height	8m	8m	8m	8m
转速 Rotating Speed	2850rpm	2850rpm	3200rpm	3200rpm
功率 Power	2.2kW	3kW	900W	900W
电压 Voltage	220V/380V	220V/380V	48/60/72V	48/60/72V

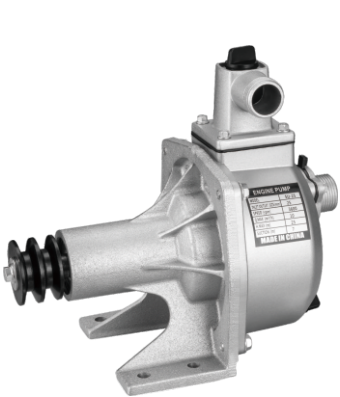

HT-SU25



HT-SU50



HT-SU80



HT-SU100s



HT-SU100



HT-GSU50

Model	HT-SU25	HT-SU50	HT-SU80	HT-SU100s	HT-SU100	HT-GSU50
进出水管口径 Inlet/Outlet dia.(mm)	25	50	80	100	100	50
流量 Rate of Flow(m³/h)	10	33	50	65	80	30
扬程 Lift(m)	25	30	35	30	25	80
吸程 Suction(m)	7	8	8	8	8	8
转速 Rotating Speed(RPM)	3600	3600	3600	3600	3600	3600

POWER SPRAYER

动力喷雾机

锐意进取 不断创新

ENTERPRISING AND
INNOVATING AS EVER
CE ISO9001



HT-TC01

配套动力 Power	168F-1
选用泵型 Selection pump	3WZ-22/30
工作压力 Pressure(kg/cm ²)	15-35
整机形式 Style	推车式 Trolley type
流量 Out put(L/min)	26-45
重量 Weight(kg)	42
体积 Volume(mm)	760 × 440 × 440



HT-DJ01



HT-DJ01B



HT-ST01



HT-ST02



HT-ST03

Model	HT-DJ01	HT-DJ01B	HT-ST01	HT-ST02	HT-ST03
配套动力 Power	168F-1	ROBIN EY20	168F-1	168F-1	168F-1
选用泵型 Selection pump	3WZ-22/30	3WZ-22/30	3WZ-22/30	3WZ-22/30	3WZ-22/30
工作压力 Pressure(kg/cm ²)	15-35	15-35	15-35	15-35	15-35
整机形式 Style	担架式 Stretcher type	担架式 Stretcher type	框架式 Frame type	手提式 Hand lift type	长架式 Long frame type
流量 Out put(L/min)	18-26	18-26	18-26	18-26	18-26
重量 Weight(kg)	31	33	34	27	27
体积 Volume(mm)	950 × 360 × 420	880 × 350 × 500	705 × 380 × 415	705 × 380 × 415	705 × 380 × 415



HT-ST04



HT-KJ01



HT-ZL25



HT-ZL22



HT-ZL30

Model	HT-ST04	HT-KJ01	HT-ZL25	HT-ZL22	HT-ZL30
配套动力 Power	168F-1	168F-1	168F-1	168F-1	170F
选用泵型 Selection pump	3WZ-22/30	3WZ-22/30	P25-3X	22ZL	30ZL
工作压力 Pressure(kg/cm ²)	15-35	15-35	10-40	10-40	10-40
整机形式 Style	长架式 Long frame type	框架式 Frame type	直连式 Direct connect type	直连式 Direct connect type	直连式 Direct connect type
流量 Out put(L/min)	18-26	18-26	18-26	15-22	30-45
重量 Weight(kg)	27	27	22	27	30
外箱尺寸 Dimension(mm)	705 × 380 × 415	575 × 410 × 430	560 × 380 × 415	630 × 380 × 430	630 × 380 × 430



3WF-3



3WF-3A



3WF-3B



3WF-18-3



3WF-18-5



3WF-18-9

Model	3WF-3	3WF-3A	3WF-3B	3WF-18-3	3WF-18-5	3WF-18-9
配套动力 Mating Power	40FP-3Z	40FP-3Z	40FP-3Z	1E40FP	1E40FP	1E40FP
药箱容积 Comtainer Capacity(L)	14	20	26	14	16	20
主机净重 Net Weight(kg)	10	11	12	10.5	10.5	11.5
功率转速 Rated Power/Rorating	1.83/6500	1.83/6500	1.83/6500	1.18/5000	1.18/5000	1.18/5000
排量 Displacement(CC)	41.5	41.5	41.5	50.3	50.3	50.3
包装箱尺寸 Package Dimension(mm)	500 × 400 × 700	500 × 410 × 730	500 × 420 × 740	490 × 415 × 675	500 × 400 × 690	500 × 410 × 745

GARDEN SPRAYER

园林喷雾机

锐意进取 不断创新

ENTERPRISING AND
INNOVATING AS EVER
CE ISO9001



HT-160L

配套动力 Power	168F-1
选用泵型 Selection pump	3WZ-22A
工作压力 Pressure(kg/cm ²)	15-30
药箱容积 Capacity(L)	160
流量 Out put(L/min)	18-26
重量 Weight(kg)	70
体积 Volume(mm)	1090 × 580 × 755



HT-50L



HT-60L



HT-100L



HT-300L

Model	HT-50L	HT-60L	HT-100L	HT-300L
配套动力 Power	TU26	168F-1	168F-1	168F-1
选用泵型 Selection pump	3WZ-18	3WZ-22A	3WZ-22A	3WZ-30A
工作压力 Pressure(kg/cm ²)	10-25	15-30	15-30	20-35
药箱容量 Capacity (L)	50L	60L	100L	300L
流量 Out put(L/min)	8-10	18-26	18-26	30-45
重量 Weight(kg)	32	40	68	100
体积 Volume(mm)	1000 × 420 × 800	800 × 660 × 820	1050 × 580 × 810	1380 × 830 × 1230

GASOLINE GENERATOR

汽油发电机

锐意进取 不断创新

ENTERPRISING AND
INNOVATING AS EVER
CE ISO9001



HT-2500
HT-3500
HT-6500

汽油发电机 GASOLINE GENERATOR



HT-2500A
HT-3500A
HT-6500A



HT-2500B
HT-3500B



HT-2500C
HT-3500C
HT-6500C



HT-2500D
HT-3500D
HT-6500D

Rated Output(kW)	1.8	2	2.5	2.8	5	6
Max.Output(kW)	2	2.2	2.7	3	5.5	6.5
Rated frequency(Hz)				50/60		
Rated voltage(V)				110/220		
Engine model(HP)	5.5	5.5	6.5	7.0	13	15
Engine type	Air-Cooled;4-Stroke;OHV,Single Cylinder					
Ignition system	Transistor Magneto					
Starting system	Recoil/Electric					
Displacement(cc)	163	163	196	210	389	420
Noise level(dB)	65	65	67	69	74	78
Lube.Oil capacity(L)	0.6	0.6	0.6	0.6	1.1	1.1
Net weight(kgs)	40	40	43	45	82	85



HT-2500N
HT-3500N
HT-6500N



HT-2500P
HT-3500P
HT-6500P



HT-2500Q
HT-3500Q
HT-6500Q



HT-2500R
HT-3500R
HT-6500R

Rated Output(kW)	1.8	2	2.5	2.8	5	6
Max.Output(kW)	2	2.2	2.7	3	5.5	6.5
Rated frequency(Hz)				50/60		
Rated voltage(V)				110/220		
Engine model(HP)	5.5	5.5	6.5	7.0	13	15
Engine type	Air-Cooled;4-Stroke;OHV,Single Cylinder					
Ignition system	Transistor Magneto					
Starting system	Recoil/Electric					
Displacement(cc)	163	163	196	210	389	420
Noise level(dB)	65	65	67	69	74	78
Lube.Oil capacity(L)	0.6	0.6	0.6	0.6	1.1	1.1
Net weight(kgs)	40	40	43	45	82	85



HT-2500S
HT-3500S
HT-6500S



HT-2500W
HT-3500W
HT-6500W



HT-2500T
HT-3500T
HT-6500T



HT-5500
HT-6500
HT-7500

Rated Output(kW)	1.8	2	2.5	2.8	5	6	7
Max.Output(kW)	2	2.2	2.7	3	5.5	6.5	7.5
Rated frequency(Hz)				50/60			
Rated voltage(V)				110/220			
Engine model(HP)	5.5	5.5	6.5	7.0	13	15	17
Engine type	Air-Cooled;4-Stroke;OHV,Single Cylinder						
Ignition system	Transistor Magneto						
Starting system	Recoil/Electric						
Displacement(cc)	163	163	196	210	389	420	450
Noise level(dB)	65	65	67	69	74	78	80
Lube.Oil capacity(L)	0.6	0.6	0.6	0.6	1.1	1.1	1.1
Net weight(kgs)	40	40	43	45	82	85	88



HT-2500E
HT-3500E
HT-6500E



HT-2500F
HT-3500F
HT-6500F



HT-2500G
HT-3500G
HT-6500G



HT-2500H
HT-3500H
HT-6500H

Rated Output(kW)	1.8	2	2.5	2.8	5	6
Max.Output(kW)	2	2.2	2.7	3	5.5	6.5
Rated frequency(Hz)				50/60		
Rated voltage(V)				110/220		
Engine model(HP)	5.5	5.5	6.5	7.0	13	15
Engine type	Air-Cooled;4-Stroke;OHV,Single Cylinder					
Ignition system	Transistor Magneto					
Starting system	Recoil/Electric					
Displacement(cc)	163	163	196	210	389	420
Noise level(dB)	65	65	67	69	74	78
Lube.Oil capacity(L)	0.6	0.6	0.6	0.6	1.1	1.1
Net weight(kgs)	40	40	43	45	82	85



HT-2500J
HT-3500J



HT-2500K
HT-3500K
HT-6500K



HT-2500L
HT-3500L
HT-6500L



HT-2500M
HT-3500M
HT-6500M

Rated Output(kW)	1.8	2	2.5	2.8	5	6
Max.Output(kW)	2	2.2	2.7	3	5.5	6.5
Rated frequency(Hz)				50/60		
Rated voltage(V)				110/220		
Engine model(HP)	5.5	5.5	6.5	7.0	13	15
Engine type	Air-Cooled;4-Stroke;OHV,Single Cylinder					
Ignition system	Transistor Magneto					
Starting system	Recoil/Electric					
Displacement(cc)	163	163	196	210	389	420
Noise level(dB)	65	65	67	69	74	78
Lube.Oil capacity(L)	0.6	0.6	0.6	0.6	1.1	1.1
Net weight(kgs)	40	40	43	45	82	85



HT-F2800A
HT-F3500A



HT-F4000B
HT-F6500B



HT-F2800C
HT-F3500C
HT-F4000C



HT-F2800D
HT-F3500D
HT-F4000D

Model	HT-F2800	HT-F3500	HT-F4000	HT-F6500
Rated Output(kW)	2.2	2.8	3.2	4.0
Max.Output(kW)	2.5	3.2	3.6	4.5
Rated Frequency(Hz)	50/60	50/60	50/60	50/60
Starting System	Recoil	Recoil	Recoil	Recoil
Stator	Copper	Copper	Copper	Copper



HT-20CX



HT-30CX



HT-40CX

型号 (Model)	配套动力 (Power)	进出水口径 (in)outlet size(mm)	扬程 Lift(m)	扬程 Suction(m)	缸径X行程(mm) BoreXstroke(mm)	重量 (Weight)kg	体积 (Volume)mm
HT-20CX	170F	50	25	7	70x55	37	510x460x485
HT-30CX	178F	80	28	7	78x62	45	580x480x530
HT-40CX	186F	100	25	7	86x70	65	645x530x625



HT-170F



HT-178F



HT-186F

型号(Model)	HT-170F	HT-178F	HT-186F
类型 Engine type	单缸四冲程, 强制冷风, 直喷式柴油机 Single cylinder, Air-cooled, 4-stroke vertical		
缸径X行程 Bore x stroke(mm)	70 × 55	78 × 62	86 × 70
排量 Displacement(cc)	211	296	406
最大输出功率 Max power output(HP)	4.2	7	9
连续输出功率 Recommended power using(HP)	3.8	6	8.2
启动方式 Start modle	手拉 Recoil	手拉 Recoil	手拉 Recoil
燃油类型 Fuel	0#(summer), -10#or-20#(winner diesel)		
燃油容积 Fuel tank capacity(L)	2.5	3.5	5.5
机油容积 Oil capacity(L)	0.75	1.1	1.65
外型尺寸 Size(MM)	410 × 370 × 460	460 × 460 × 510	500 × 470 × 530
重量 Weight(Kgs)	27	33	48

HIGH PRESSURE WASHER

清洗机

锐意进取 不断创新

ENTERPRISING AND
INNOVATING AS EVER
CE ISO9001



HT-1001

流量 Rate Of Flow	8L/min
压力 Pressure	130 bar/1800psi
配合动力 Power	6.5 HP



HT-1002

流量 Rate Of Flow	8L/min
压力 Pressure	130 bar/1800psi
配合动力 Power	EY-20 5.0 HP



HT-1003

流量 Rate Of Flow	13.6L/min
压力 Pressure	150 bar/2200psi
配合动力 Power	6.5HP



HT-288-4



HT-2900



HT-2500P



HT-2100

Model	HT-288-4	HT-2500P	HT-2100	HT-2900
Max Pressure(bar/psi)	100bar	120bar/1850psi	100bar/1600psi	120bar/1850psi
Theoretical Flow(L/min)	10L/min	13.7L/min	12.7L/min	14.5L/min
Motive Power(kW)	1.3kW	3.0kW/2.2kW	1.8kW	2.2kW
Power Supply(V)	220V	380V/220V	220V	220V
Rotating Speed(RPM)	2800RPM	1400RPM	2800RPM	1400RPM



HT-20L



HT-30L



HT-35L



HT-70L



HT-80L



HT-100L

Model	HT-20L	HT-30L	HT-35L	HT-70L	HT-80L	HT-100L
Power	1500W	1500W	1500W	3000W	4500W	4500W
Capacity	20L	30L	35L	70L	80L	100L
Air flow rate	53L/S	53L/S	53L/S	106L/S	120L/S	120L/S
Vacuum suction	200mbar	200mbar	200mbar	220mbar	250mbar	250mbar
Voltage	220~240V	220~240V	220~240V	220~240V	220~240V	220~240V
Length of the cable	5m	5m	5m	5m	5m	5m
G.W	10.65kgs	11.5kgs	11.95kgs	24.8kgs	27.1kgs	29.5kgs
Carton dimension	40 × 40 × 53.5cm	40 × 40 × 70cm	40 × 40 × 74cm	51 × 58 × 95cm	51 × 58 × 95cm	53 × 57 × 100cm



HT-100L

Iron shell foam machine

Working Pressure	0.1~0.25Mpa
Capacity	70L
Max Pressure	0.25Mpa

Iron shell foam machine



HT-F01



HT-F02

Stainless steel foam machine



HT-F03

Stainless steel foam machine

Working Pressure	0.1~0.3Mpa
Capacity	70L
Max Pressure	0.35Mpa



Foam washing gun



Funnel



Inlet valve Nozzle



Plastic tube




3WZ-22
3WZ-30



3WZ-22A
3WZ-30A



3WZ-22-1
3WZ-30-1

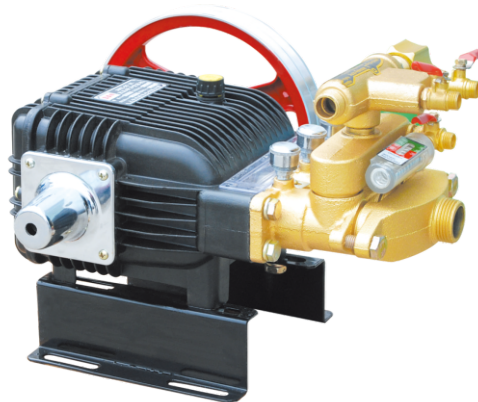

3WZ-22-1A
3WZ-30-1A

Pump Features

- Castiron pump head
- Casting aluminium housing
- Stainless steel air chamber
- Pressure adjustable
- Stainless steel plunger
- Heavy-duty plunger sealing set

产品特点

铸铁泵头
铸铝泵壳
不锈钢空气室
压力可调式
不锈钢柱塞
高质量柱塞密封件

Optional Components

- Casting brass pump head
- Heat-treatment plunger
- Ceramic plunger
- Brass v-packing seat
- Stainless steel valves
- Copper oil cup

可选择部件


铸铜泵头
热处理柱塞
陶瓷柱塞
铜V-迫紧底座
不锈钢阀门
铜油杯



3WZ-80



3WZ-120

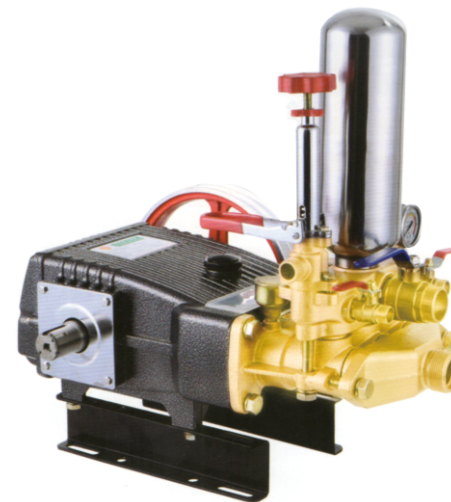

3WZ-150



3WZ-180

型号 Model	柱塞数柱塞直径 Plunger no.x Dia.	工作压力 Pressure (Kg/cm ²)	流量 Output	引擎 Power	重量 Weight	尺寸 Size (mm)
3WZ-22	3pcs × 22mm	20-35	18-26L/min	2-3HP	10kg	390 × 290 × 330
3WZ-30	3pcs × 30mm	20-35	30-45L/min	3-4HP	11kg	410 × 310 × 340
3WZ-80	3pcs × 34mm	20-35	61-77L/min	5-7HP	23kg	440 × 370 × 450
3WZ-120	3pcs × 38mm	10-50	80-120L/min	5-10HP	25kg	520 × 380 × 570
3WZ-150	3pcs × 45mm	10-50	110-140L/min	10-12HP	39kg	590 × 380 × 590
3WZ-180	3pcs × 45mm	10-50	120-160L/min	10-12HP	44kg	630 × 400 × 650




Three Layer High-pressure Spray Hose

尺寸 Size			重量 Weight	工作压力(Bar)	爆破压力(Bar)
英制 Inch	内径ID(mm)	外径OD(mm)	100米(Kgs/100m)	Working Pressure	Bursting Pressure
1/4	6.5	11	8	45	130
5/16	8	13	10	30	100
5/16	8.5	13.5	11	36	110
5/16	8.5	14	12	40	120
3/8	10	15	14	35	105



Five Layer High-pressure Spray Hose

尺寸 Size			重量 Weight	工作压力(Bar)	爆破压力(Bar)
英制 Inch	内径ID(mm)	外径OD(mm)	100米(Kgs/100m)	Working Pressure	Bursting Pressure
1/4	6.5	12	10	60	180
5/16	8.5	14	13.5	53	160
5/16	8.5	14.5	14.5	57	170
3/8	10	16	16	50	150
1/2	13	20	22.5	40	120

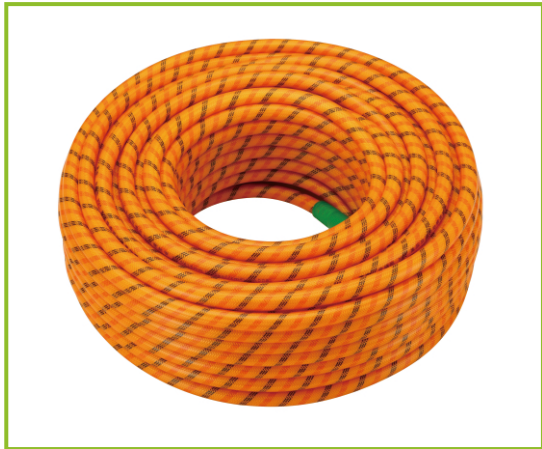

Weaving High-pressure Spray Hose

尺寸 Size			重量 Weight	工作压力(Bar)	爆破压力(Bar)
英制 Inch	内径ID(mm)	外径OD(mm)	100米(Kgs/100m)	Working Pressure	Bursting Pressure
1/4	8.5	12	10	65	200
5/16	8.5	13.5	12	57	170
5/16	8.5	14	13	60	180
3/8	10	16	16	50	150
1/2	13	19	22	40	120



尺寸 Size (inch)	内径 Diameter(mm)	2Bar (kg/m)	3Bar (kg/m)	4Bar (kg/m)	6Bar (kg/m)	8Bar (kg/m)
1"	25.4 ± 1.3	0.4	/	0.8	/	/
1-1/4"	31.8 ± 1.3	0.4	/	/	/	/
1-1/2"	38.1 ± 1.5	0.3	/	0.6	/	/
2"	50.3 ± 2.0	0.27	0.41	0.47	0.78	/
2-1/2"	63.5 ± 2.3	0.23	0.43	0.54	0.67	/
3"	76.2 ± 2.3	0.23	0.38	0.41	0.6	/
4"	101.6 ± 2.5	0.2	0.35	0.41	0.5	/
5"	121.0 ± 2.8	0.17	/	0.3	0.47	1.75
6"	152.4 ± 3.0	0.13	/	0.31	0.35	1.35
8"	203.2 ± 3.5	0.13	/	0.17	0.3	/
10"	254.1 ± 4.0	0.15	/	/	/	/
12"	304.8 ± 4.5	0.15	/	/	/	/



尺寸 Size (inch)	内径 Diameter(mm)	公差 Tolerance(mm)	长度 Length(m)
1"	25	1.5	15-30
1-1/4"	32	1.5	
1-1/2"	38	1.5	
2"	50	2	
2-1/2"	65	2.3	
3"	75	2.3	
4"	102	2.3	
6"	150	2.5	
8"	200	2.5	



Japanese Type



Japanese Type with clamp



Malaysia Type



Chinese Type



Korean Type



ZW Series



Electric Vibrator

Model	Power(KM/HP)	Voltage(V)	Frequency(Hz)	G.W.(KG)	Material body	Size(cm)
ZN-70GB	1.5/2	220/380	50	11	Aluminum	36.5 × 18 × 21
ZN-90GB	2.2/3	220/380	50	14	Aluminum	38 × 18 × 26
ZN-70XB	1.5/2	220/380	50	11	Aluminum	36.5 × 18 × 21
ZN-90XB	2.2/3	220/380	50	14	Aluminum	38 × 18 × 26
ZN-70P	1.5/2	220/380	50	11	Aluminum	36.5 × 18 × 21
ZN-90P	2.2/3	220/380	50	14	Aluminum	38 × 18 × 26
ZN-70X	1.5/2	220/380	50	11	Aluminum	36 × 28 × 30
ZN-90X	2.2/3	220/380	50	14	Aluminum	39 × 28 × 30



Japanese Type



Japanese Type with clamp



Turkish Type




Malaysia Type



Australian Type



Chinese Type



Mikass Type



Hayashi Type



Portable

Model		ZV25-6	ZV28-6	ZV35-6	ZV38-6	ZV45-6	ZV50-6	ZV60-6	ZV70-6
Dia.of Vibrator head(mm)		25	28	35	38	45	50	60	70
Vibrator Frequency(HZ)		230	230	200	200	200	200	200	200
Dia of Fiexible Hoes(mm)	Ourside	24	25	30	30	32	36	36	36
	inner	14	14	16	16	18	20	22	22
Dia of Fiexible Shaft(mm)		8	8	10	10	10	13	13	13
Amplitude(mm)		1.10	1.11	1.15	1.18	1.2	1.21	1.28	1.32
Weight(Kg)		9	9.5	12	12.5	14	17	21	24.2
Dimension(mm)(6m)		720×650×50						780 × 650 × 70	
Hose Length		6(Optional)							
Couling(Optional)		Chinese/Japanese/Malaysian/Dynapac/Turkish/Australia Type							

20cm直喷枪
20cm straight gun

A01



30cm直喷枪
30cm straight gun

A02



30cm双把直喷枪
30cm straight gun (double head)

A03



60cm直喷枪
60cm straight gun

A04



90cm直喷枪
90cm straight gun

A05



20cm直喷枪 (铜)
20cm straight gun (copper)

A06



30cm直喷枪 (铜)
30cm straight gun (copper)

A07



30cm双把直喷枪 (铜)
30cm straight gun double head (copper)

A08



60cm直喷枪 (铜)
60cm straight gun (copper)

A09



90cm直喷枪 (铜)
90cm straight gun (copper)

A10



30cm意大利款喷枪
30cm Italy type gun

A11



60cm意大利款喷枪
60cm Italy type gun

A12



90cm意大利款喷枪
90cm Italy type gun

A13



30cm泰国款喷枪
30cm Thailand type gun

A14



60cm泰国款喷枪
60cm Thailand type gun

A15



90cm泰国款喷枪
90cm Thailand type gun

A16



90cm泰国款喷枪 (全铜100%)
90cm Thailand type gun (copper 100%)

A17



60cm轴流喷枪
60cm Axial gun

A18



90cm轴流喷枪
90cm Axial gun

A19



90cm直喷枪 (全铜100%)
90cm straight gun (copper 100%)

A20



90cm直喷枪 (加重)
90cm straight gun (heavy)

A21



30cm埃及款喷枪
30cm Egypt type gun

A22



60cm埃及款喷枪
60cm Egypt type gun

A23



90cm埃及款喷枪
90cm Egypt type gun

A24



60cm弯头喷枪
60cm Bend head gun

A25



90cm弯头喷枪
90cm Bend head gun

A26



60cm弯头喷枪
60cm Bend head Anti-vind gun

A27



90cm弯头喷枪
90cm Bend head Anti-vind gun

A28



120cm园林远程喷枪
120cm Long-range gun

A29



60泰式加厚喷枪
60cm Thai Thick Spray Gun

A30



风送喷枪
Air pressure spray gun

A31



60前调枪
60 Front-Adjust Gun

A32



90浇水枪
90 Watering gun

A33



90前调枪
90 Front-Adjust Gun

A34



60弯管
60 Ellenbogen

A35



追肥枪
Fertilizer gun

A36



意大利全铝喷枪
ITALY WHOLE-ALUMINUM
SPRAY GUN

A37



加厚铜枪
Thicker copper spray gun

A38



A39
手枪式喷枪
pistol lance



A40
意大利手枪式喷枪
Italy pistol lance



A41
意大利式喷雾枪
Italianische spritzpistole



A42
台湾短枪
Taiwan short gun



A43
意大利式喷雾枪 (短)
Italianische spritzpistole (short)



A44
板式防风喷枪
Board type windbreak gun



A45
板式防风喷枪 (铝柄)
Board type windbreak gun (alu. handle)



A46
清洗枪
Cleaning gun



A47
欧式喷枪
Europe style spray gun



A48
防风帽
Anti-wind cap



A49
轴流头
Axial cap






A50
轴流头
Axial cap





A51
小气流帽
Small air flow cap



A52
大气流帽
Big air flow cap

**B01**
9米高压清洗管 9m High Pressure Hose**B02**
曲轴Crank shaft**B03**
担架 Stretcher**B04**
日本式担架 Japanese Stretcher**B05**
三档皮带轮 Pulley-3 Wings**B06**
五档皮带轮 Pulley-5 Wings**B07**
气室 Air Chamber**B08**
加长气室 Longer Air Chamber**B09**
吸水滤网 Filter Net**B10**
1 1/4球阀开关 1 1/4 Cock**B11**
1/2开关 1/2 Cock**B12**
1/2本色开关 1/2 Cock with original colour**B13**
3/8 转 1/2开关 3/8 to 1/2 Cock**B14**
3/8开关 3/8 Cock**B15**
1/4直通开关 1/4 Ball Cock**B16**
1/4开关 1/4Cock**B17**
1/4三通开关 1/4 Tri-entrance Cock**B18**
1/2铜接头 1/2 Brass Joint**B19**
3/4转 1/2外接 3/4to 1/2 External**B20**
φ 8.5mm双头斜口 φ 8.5mm two way joint**B21**
φ 19mm胶管组件 φ 19mm hose joint**B22**
φ 19mm进水组件 φ 19mm suction joint**B23**
三通 Y-joint**B24**
活动接头 Flexible joint**B25**
φ 8.5mm 胶管组件
φ 8.5mm hose joint**B26**
φ 8.5/10mm 胶管组件
φ 8.5/10mm hose joint**B27**
φ 13mm 胶管组件
φ 13mm hose joint**B28**
φ 8.5mm大活接
φ 8.5mm Hose Big Flexble joint**B29**
φ 8.5mm小活接
φ 8.5mm Hose Small Flexible joint**B30**
曲轴油封 Oil Seal Crank Shaft**B31**
柱塞油封 Oil Seal Plunger**B32**
V型平垫 V-Packing seat**B33**
V型圈 V-Packing**B34**
夹布V型 Special V-packing**B35**
A1016皮带 A1016 V-Belt**B36**
挡水环 Breakwater Ring**B37**
阀套 Valve Seal**B38**
黄油迫紧 Grease seal**B39**
轴承 Bearing**B40**
汽油机皮带轮 Gasoling Engine Wheel**B41**
不锈钢活门 Stainless Steel Valve**B42**
塑料活门 Plastic Valve**B43**
回水油封 Oil Seal Overflow**B44**
弹簧衬托 Spring Seat**B45**
曲轴箱
Crank Case**B46**
摇管架
Pipe Rack**B47**
螺纹进回水管 Screw Thread
Transparent Suction&Overflow Hose**B48**
进回水管
Suction & Overflow Hose**B49**
缸体 Cylinder**B50**
排水室 Discharge Metal**B51**
进水室Suction Metal**B52**
回水体 Overflow Body**B53**
提手调压组件 Partial Regulator**B54**
提水调压总成
Reagulator Assy**B55**
韩式提手调压组件
Partial Regulator-Korea style**B56**
调压管 Regulator Pipe**B57**
压力表 Pressure Gauge**B58**
加油盖 Oil Cover**B59**
轴套 "A" Bearing Cover "A"**B60**
轴套 "B" Bearing Cover "B"**B61**
调压轮 Adjusting Pressure Screw**B62**
探油镜 Oil Level**B63**
调压弹簧 Regulator Spring**B64**
平键销 Flat key**B65**
后盖垫 Gasket**B66**
放油螺丝 Screw for oil outlet**B67**
阀座 Valve Seat**B68**
弹簧销 Spring Pin**B69**
阀杆 Valve Rod**B70**
压盖 Grand**B71**
黄油环 Grease ring**B72**
钢珠 Ball**B73**
自卸阀杆 Valve Rod for Automatic**B74**
铜油杯 Brass Grease Cup**B75**
铁油杯 Iron Grease Cup**B76**
调压扳手 Regulator Spanner**B77**
连杆 Connecting Rod**B78**
喷瓷柱塞 Plunger with Ceramic**B79**
柱塞 Plunger**B80**
柱塞销 Plunger Pin**B81**
铁进水斜口 Iron Suction Joint**B82**
铁回水斜口 Iron Overflow Joint**B83**
进水两角螺帽
Suction Hose Nut(Two Wings)**B84**
进水六角螺帽
Suction Hose Nut(HEX)**B85**
回水两角螺帽
Overflow Hose Nut(Two Wings)**B86**
回水六角螺帽
Overflow Hose Nut(HEX)**B87**
泵脚
Bed,Crank Case

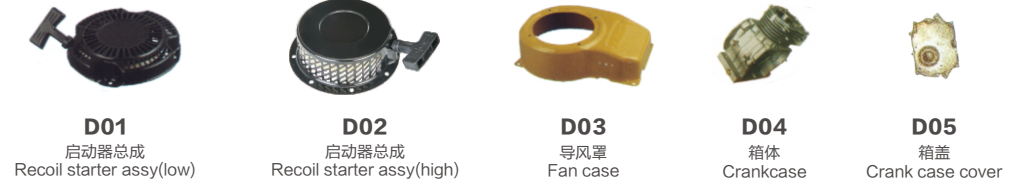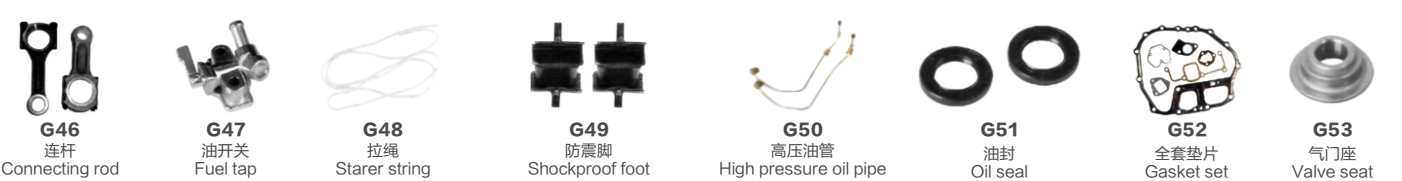




E01
汽缸头
Cylinder head



E02
气缸头总成
Cylinder head assy



E03
箱体
Crankcase



E04
箱盖 (高)
Crankcase cover (high)



E05
箱盖 (低)
Crankcase cover (low)



E06
电机端盖
Frame rear



E07
电机支架
behind frame



E08
连杆
connect rod



E09
活塞带环
Piston set with ring



E10
活塞
Piston




E11
活塞环
Piston ring



E12
飞轮
Fly wheel



E13
飞轮 (电启动)
Fly wheel (electric)



E14
调压器 (铝壳)
AVR (Alu)



E15
调压器 (塑壳)
AVR (plastic)



E16
整流器
Rectifier




E17
转子
Rotor



E18
定子
Stator



E19
电机风叶
Rotor fan



E20
箱体垫片
Gasket (crankcase)



E21
缸头垫片
Gasket (cylinder head)



E22
水泵空滤器
Water pump air filter



E23
油滤空滤器
Oil level air cleaner



E24
滤芯
Filter



E25
机组空滤器
Generator Air cleaner



E26
机组空滤器海绵
Generator Air cleaner sponge



E27
全套垫片
Gasket kit



E28
拉盘
Recoil starter assembly



E29
启动轮
Drum wheel



E30
卷簧
Pawling spring starter



E31
油开关 (大头)
Oil switch (head)



E32
油箱开关
Fuel control valve



E33
188内螺纹油开关
188 internal threaded oil switch



E34
机架脚垫
Rack footrests



E35
拉绳
Starter string



E36
风罩
Fan case



E37
启动鼓
Starter pulley



E38
后盖
Back cover



E39
拉手
Starter handle



E40
机组化油器
Gen carburator



E41
水泵化油器
Pump carburator



E42
168化油器带杯
168 Carburator with cup



E43
LPG化油器168水泵
168 LPG Carburator



E44
LPG机组化油器168
SH2900 Carburator



E45
LPG机组化油器188
SH7000 Carburator



E46
机油报警器/套
Oil alert set



E47
高压包
Ignition coil



E48
高压帽
Spark plug cap



E49
马达
motor



E50
继电器
Relay



E51
挺柱
Valve lifter



E52
凸轮轴 (尼龙)
Camshaft (nylon)



E53
凸轮轴 (铁)
Camshaft (iron)



E54
调速齿轮
Governor gear set



E55
滑套
Governor slider



E56
调速轴
Governor gear shaft



E57
168水泵消音器
168 muffler



E58
188水泵消音器
188 muffler



E59
188水泵消音器弯接
188 muffler connector



E60
机组消声器
Generator muffler



E61
消声器隔热板
Insulator muffler



E62
消声器支架
Stand for muffler



E63
推杆支架
Rod bracket



E64
熄火开关
On/off switch



E65
摇臂总成
Rock arm



E66
水泵调速座
Pump speed shift seat



E67
机组调速座
Generator speed controller



E68
拉杆弹簧
Spring (pull rod)



E69
调速器拉杆
Pull rod



E70
调节臂
Governor arm



E71
顶帽
Rock arm cover



E72
推杆
Push rod



E73
摆杆
Governor arm shaft



E74
复位弹簧
Return spring



E75
弹簧拉盘套装
Spring&Pull Rod set



E76
呼吸盖
Cylinder head cover



E77
mu45电压表
Mu45 voltmeter



E78
皮带轮 (铝)
Pulley (aluminum)



E79
皮带轮 (铁)
Pulley (iron)



E80
进排气门
Intake/exhaust valve



E81
进排气门弹簧座
Valve spring set



E82
曲轴
Crankshaft



E83
汽门油封
Steam gate oil seal



E84
火花塞
Spark plug




E85
出油接口 (锌)
Fuel control valve (Zinc)



E86
出油接口
Fuel control valve



E87
水泵油箱滤网
Water pump tank filter



E88
水泵油箱
Pump fuel tank



E89
油箱盖
Fuel tank cap

