



更多产品敬请关注
Stay tuned for more products



台州市蒙花机械有限公司

TAIZHOU MENGHUA MACHINERY CO.,LTD.

Professional
Garden housekeeper

台州市蒙花机械有限公司
TAIZHOU MENGHUA MACHINERY CO.,LTD.

地址: 浙江台州市椒江区三甲街道海亮路85号
Add: 85#,Hailiang Road,Sanjia Street,Jiaojiang,Taizhou City,Zhejiang,China

电话/Tel: +86-576-8275 9958
+86-576-8812 1163

E-mail:sales@menghua.cn Http://www.menghua.cn

注: 本目录内所有系列产品说明、数据和实际之间可能存在误差, 请以实际产品为准。如有更改, 恕不另行通知。
Note: this directory all series of products, there may be errors between data and actual, please refer to our actual product.
Are subject to change without prior notice.



Http://www.menghua.cn
ISO9001 CE

New factory



公司简介

台州市蒙花机械有限公司成立于1991年，是一家综合性，集研究、开发、销售一体的科技企业。本公司位于经济发达的沿海城市---台州。交通十分便捷，运输网络遍布全球。公司专业生产动力喷雾机、高压清洗机、橡胶制品、园林机械、喷雾枪、柴油、汽油发电机、水泵、割灌机等一系列产品，产品出口三十多个国家和地区。拥有一支专业的生产技术人员、管理人员、营销服务人员的综合型人才队伍，本公司本着求实、严谨、诚信的经营理念，不断加大科技创新投入，将设计新颖、质量稳定、价格合理的产品推广到世界各国。公司诚交国内外朋友，共同发展，共创辉煌！

30000^{m²}

占地面积 Covers an area



COMPANY FILE

Established in 1991, Taizhou Menghua Machinery Co., Ltd. is a comprehensive scientific and technological enterprise integrating research, development and sales. It is located in the developed coastal city of Taizhou, with convenient transportation and network all over the world.

Our company specializes in the production of POWER SPRAYER, GASOLINE ENGINE, GASOLINE WATER PUMP, GASOLINE GENERATOR SET, HIGH PRESSUE CLEANING MACHINE, GARDEN MACHINERY, SPRAYER GUN,BRUSH CUTTER Etc., We export these goods to more than 30 countries and areas. We have a group of professional production technicians, managers, a comprehensive talent team of marketing service personnel. In line with the business philosophy of being realistic, rigorous and honest, Menghua continuously increases investment in scientific and technological innovation, and promotes products with novel design, stable quality and reasonable prices to all countries in the world. We sincerely make friends at home and abroad, common development, create brilliant together!



ISO9001 CE
Http://www.menghua.cn



▲ 汽油发动机生产流水线 Engine Production Lines



▲ 汽油发动机生产流水线 Engine Production Lines



▲ 动力配泵生产流水线 Engine With Sprayer Production Lines



▲ 喷雾器生产流水线 Sprayer Production Lines

Modern production lines

现代化生产线

具有专业的各系列先进生产设备，公司十分注重科学管理与新产品研发，技术力量雄厚、设备齐全、工艺先进，具有严格的质量管理体系和精益求精的工作态度，产品质量稳定，时刻准备为您提供优良的服务。

With professional series of advanced production equipment, the company attaches great importance to scientific management and new product research and development, strong technical force, complete equipment, advanced technology, has a strict quality management system and excellent working attitude, stable product quality, always ready to provide you with excellent service.

TAKE CONTROL

OF EVERY DETAIL

掌控每一处细节

公司投入巨资，新建现代化工业厂房，采用尖端技术和设备，使新的制造车间成为世界上最现代化的生产车间。


The company has invested heavily in the construction of modern industrial factories, adopting cutting-edge technology and equipment, making the new manufacturing workshop the most modern production workshop in the world.



168箱体加工中心
168Crankcase Machining Center



压铸机车间
Die-casting Mold Department

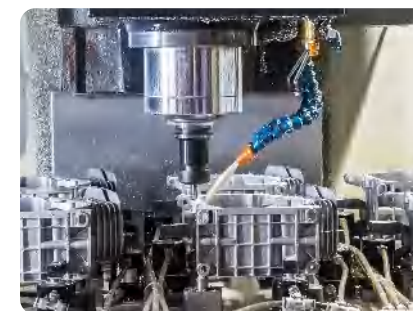

168压铸机车间
168Die-casting Mold Department



加工中心
Machining Center



767注塑车间
767Knapsack Sprayer Injection Department



TEST EQUIPMENT

检测设备



EXTREME PERFORMANCE

The purest interpretation of extreme performance

对极限性能的最纯粹诠释

During the productive process, we are in strict accordance with the international quality system standards. The production department have to execute pre-production inspection before production, and we need to inspect every step during productive process. When the process is completed, we will execute all-round product performance detection.

公司在生产过程当中严格按照国际质量体系标准执行；生产部门在领料时须进行产前检验，生产过程中每一道工序须进行检验，工序完成后须对产品进行全方位性能检测。

POWER SPRAYER SERIES

动力喷雾机系列

ISO9001 CE
Http://www.menghua.cn

CATALOG

以科技探研机电发展向，
发掘蒙花品牌传奇！
诞生既开创人类新的文明起源，
注定传奇不止！
蒙花同世界一起见证！

Science is the direction of development
Manufacturing was Menghua brand legend!
Born as a new human civilization origin,
Destined to legend not only!
Menghua with world witness!

动力喷雾机系列
Power Sprayer Series

01

担架(框架)动力喷雾机系列
Frame Type Power
Sprayer Series

12

推车式园林喷雾机系列
Power Sprayer Series

15

背负式动力喷雾器系列
Knapsack Power
Sprayer Series

17

汽油机水泵系列
Gasoline Engine
Pump Series

20

电机水泵系列/振动泵系列
Motor Pump Series
Vibrator Series

24

自吸式离心泵系列
Self-priming Centrifugal
Pump Series

25

发动机系列
Engine Series

27

汽油发电机系列
Gasoline Generator Series

33

柴油发电机系列
Diesel Generator Series


40

割草机系列
Brush Cutter Series

41

配件系列
Accessories

43

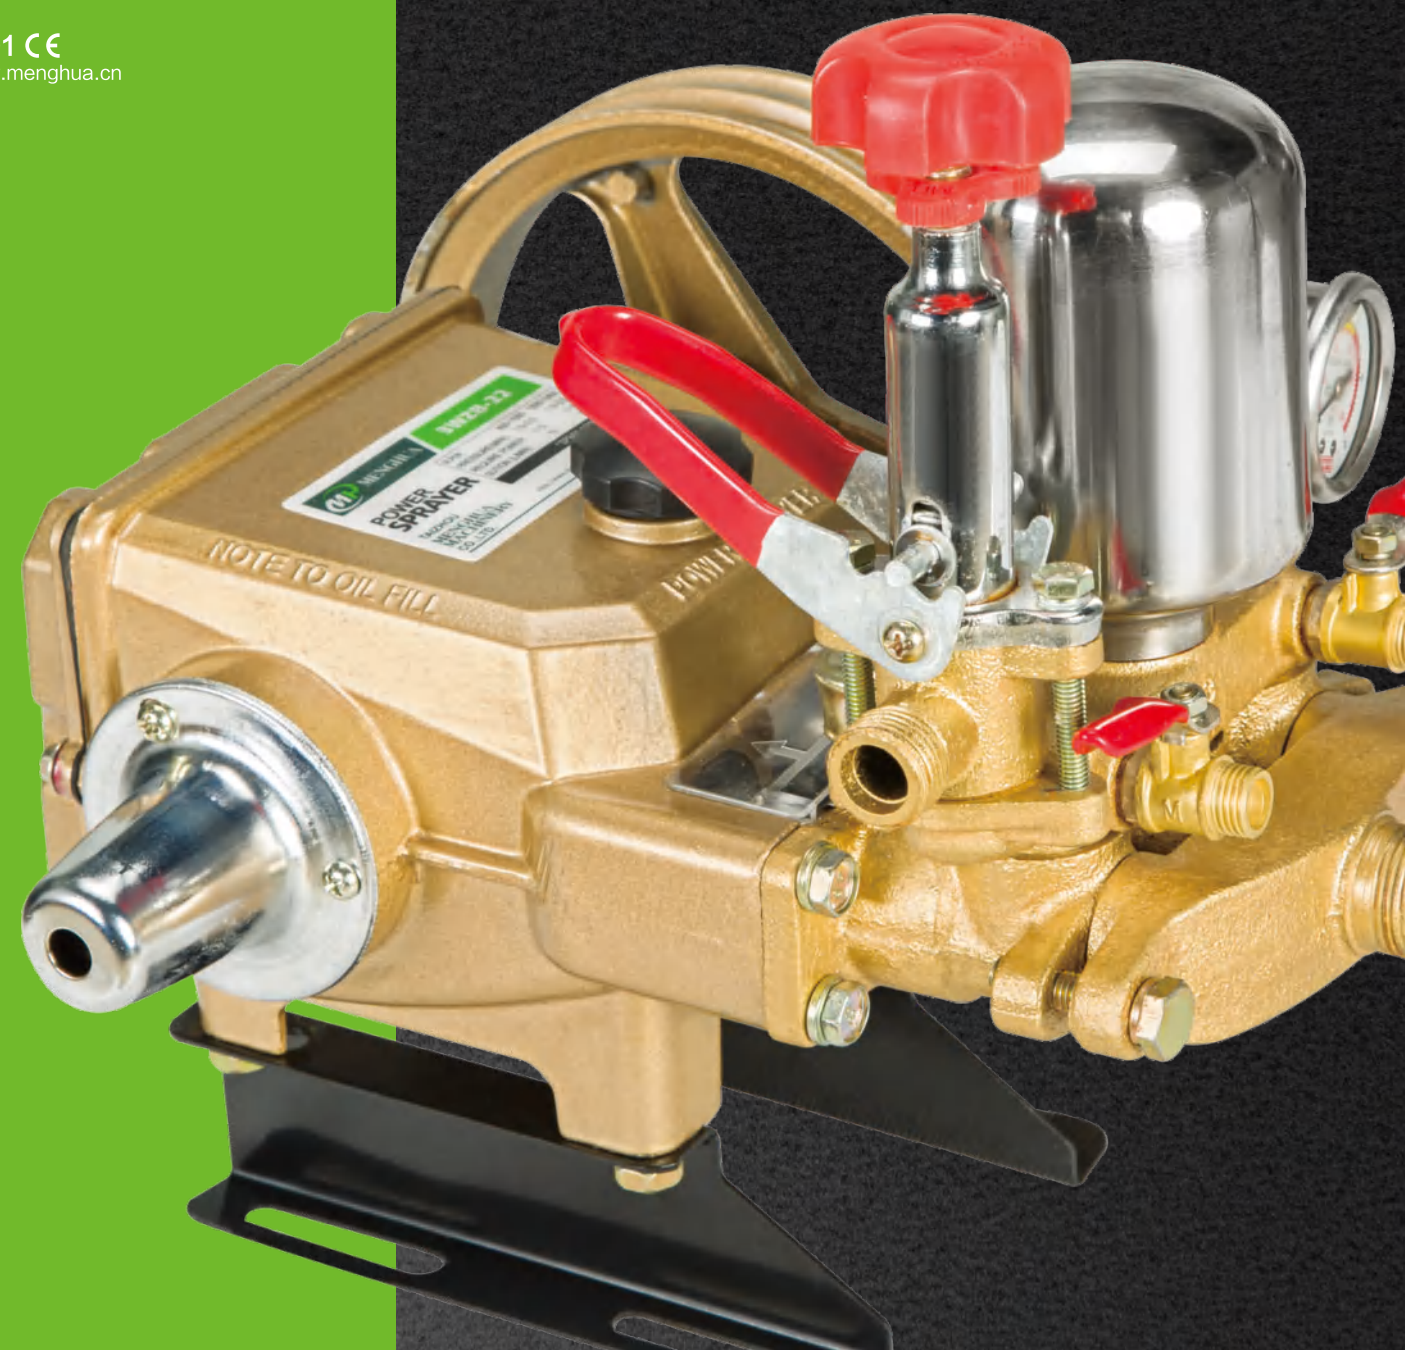



• Model: MH-22A-1



• Model: MH-22A-2



• Model: MH-22A-3



• Model: MH-22C-1



• Model: MH-22C-2



• Model: MH22WK-1

型号 Model	MH-22A-1	MH-22A-2	MH-22A-3	MH-22C-1	MH-22C-2	MH22WK-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	13-22	13-22	13-22	13-22	13-22	13-22
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×22	3×22	3×22	3×22
尺码(Dimension) mm	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330
重量(Weight) kgs	7	7	7	7	7	7.5



• Model: MH-22WK-2



• Model: MH-22G-1



• Model: MH-22G-2



• Model: MH-22D-1



• Model: MH-22D-2



• Model: MH-22E-1

型号 Model	MH-22WK-2	MH-22G-1	MH-22G-2	MH-22D-1	MH-22D-2	MH-22E-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	13-22	13-22	13-22	13-22	13-22	13-22
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×22	3×22	3×22	3×22
尺码(Dimension) mm	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330
重量(Weight) kgs	7.5	8	8	8	8	8



• Model: MH-22E-2



• Model: MH-22F-1



• Model: MH-22F-2



• Model: MH-22JG-1



• Model: MH-22JG-2



• Model: MH-22WB-1

型号 Model	MH-22E-2	MH-22F-1	MH-22F-2	MH-22JG-1	MH-22JG-2	MH-22WB-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	13-22	13-22	13-22	13-22	13-22	13-22
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×22	3×22	3×22	3×22
尺码(Dimension) mm	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330
重量(Weight) kgs	8	8	8	8	8	10



• Model: MH-22WB-2



• Model: MH-22WB-3



• Model: MH-22WD-1



• Model: MH-22WD-2



• Model: MH-22WE

型号 Model	MH-22WB-2	MH-22WB-3	MH-22WD-1	MH-22WD-2	MH-22WE
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	13-22	13-22	13-22	13-22	13-22
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	1.5-2	1.5-2	1.5-2	1.5-2	1.5-2
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×22	3×22	3×22
尺码(Dimension) mm	330×280×330	330×280×330	330×280×330	330×280×330	330×280×330
重量(Weight) kgs	10	10	10	10	9.5



• Model: MH-30A-1



• Model: MH-30A-2



• Model: MH-30A-3



• Model: MH-30C-1



• Model: MH-30C-2



• Model: MH30WK-1

型号 Model	MH-30A-1	MH-30A-2	MH-30A-3	MH-30C-1	MH-30C-2	MH30WK-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	30-40	30-40	30-40	30-40	30-40	30-40
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	2-3	2-3	2-3	2-3	2-3	2-3
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30	3×30	3×30	3×30	3×30	3×30
尺码(Dimension) mm	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340
重量(Weight) kgs	9.5	9.5	9.5	9.5	9.5	10



• Model: MH-30WK-2



• Model: MH-30G-1



• Model: MH-30G-2



• Model: MH-30D-1



• Model: MH-30D-2



• Model: MH-30E-1

型号 Model	MH-30WK-2	MH-30G-1	MH-30G-2	MH-30D-1	MH-30D-2	MH-30E-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	30-40	30-40	30-40	30-40	30-40	30-40
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	2-3	2-3	2-3	2-3	2-3	2-3
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30	3×30	3×30	3×30	3×30	3×30
尺码(Dimension) mm	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340
重量(Weight) kgs	10	10	10	10	10	10



• Model: MH-30E-2



• Model: MH-30F-1



• Model: MH-30F-2



• Model: MH-30JG-1



• Model: MH-30JG-2



• Model: MH-30WB-1



• Model: MH-30WB-2



• Model: MH-30WB-3



• Model: MH-30WD-1



• Model: MH-30WD-2



• Model: MH-30WE

型号 Model	MH-30E-2	MH-30F-1	MH-30F-2	MH-30JG-1	MH-30JG-2	MH-30WB-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	30-40	30-40	30-40	30-40	30-40	30-40
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-4	1-4
马力(Motor) HP	2-3	2-3	2-3	2-3	2-3	2-3
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30	3×30	3×30	3×30	3×30	3×30
尺码(Dimension) mm	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340	400×300×340
重量(Weight) kgs	10	10	10	10	10	10

型号 Model	MH-30WB-2	MH-30WB-3	MH-30WD-1	MH-30WD-2	MH-30WE
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	30-40	30-40	30-40	30-40	44-66
工作压力(Pressure) Pa	1-4	1-4	1-4	1-4	1-5
马力(Motor) HP	2-3	2-3	2-3	2-3	5-6
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30	3×30	3×30	3×30	3×28×30
尺码(Dimension) mm	400×300×340	400×300×340	400×300×340	400×300×340	410×350×390
重量(Weight) kgs	10	10	10	10	14



• Model: MH-STAR50



• Model: MH-JPS40



• Model: MH-50



• Model: MH-80-1



• Model: MH-80-2



• Model: MH-90

型号 Model	MH-STAR50	MH-JPS40	MH-50	MH-80-1	MH-80-2	MH-90
转速(R.P.M) Rpm	800-1200	800-1200	800-1200	800-1200	800-1200	800-1200
吸水量(Output) L/min	30-40	30-40	44-66	65-80	65-80	33-55
工作压力(Pressure) Pa	1-4	1-4	1-5	1-5	1-5	1-5
马力(Motor) HP	2-3	2-3	5-6	3-7.5	3-7.5	6.5-7
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30	3×30	3×28×30	3×34	3×34	4×30×20
尺码(Dimension) mm	400×300×340	400×300×340	410×350×390	435×370×450	435×370×450	425×360×445
重量(Weight) kgs	10	10	14	19	19	18.5



• Model: MH-120-1



• Model: MH-120-2



• Model: MH-180

型号 Model	MH-120-1	MH-120-2	MH-180
转速(R.P.M) Rpm	800-1200	800-1200	800-1200
吸水量(Output) L/min	103-116	103-116	125-150
工作压力(Pressure) Pa	1-5	1-5	1-5
马力(Motor) HP	5-7	5-7	7.5-12
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×38	3×38	3×45
尺码(Dimension) mm	450×370×580	450×370×580	620×380×650
重量(Weight) kgs	30	30	30

GARDEN MACHINE SERIES

园林机械系列



担架(框架)动力喷雾机系列
Frame Type Power Sprayer Series

MP 蒙花机械
MENGHUA



• Model: MH168F-22A



• Model: MH168F-22A-1



• Model: MH168F-22A-2

产品特点/Product features

雾化均匀，射程高，作业范围广，效率更高。
安全省油高效，低噪音平稳运行。

Uniform atomization, high range, wide operating range, higher efficiency.
Safe and fuel-efficient, low noise and smooth operation.

型号 Model	MH168F-22A	MH168F-22A-1	MH168F-22A-2
转速(R.P.M) Rpm	800-1200	800-1200	800-1200
吸水量(Output) L/min	14-22	14-22	14-22
工作压力(Pressure) Pa	20-45	20-45	20-45
马力(Motor) HP	168F	168F	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×22
尺码(Dimension) mm	800×350×440	700×395×415	670×350×435
重量(Weight) kgs	32	45	40



• Model: MH168F-22A-4



• Model: MH168F-22A-5



• Model: MH-25ZL-1

产品特点/Product features

雾化均匀，射程高，作业范围广，效率更高。
安全省油高效，低噪音平稳运行。

Uniform atomization, high range, wide operating range, higher efficiency.
Safe and fuel-efficient, low noise and smooth operation.

型号 Model	MH168F-22A-4	MH168F-22A-5	MH-25ZL-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200
吸水量(Output) L/min	14-22	14-22	22-60
工作压力(Pressure) Pa	20-45	20-45	1-8
马力(Motor) HP	168F	168F	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×25
尺码(Dimension) mm	580×405×430	850×440×460	580×405×430
重量(Weight) kgs	45	42	42



• Model: MH-26ZL-1



• Model: MH-26ZL-2



• Model: MH-30ZL-1

产品特点/Product features

雾化均匀，射程高，作业范围广，效率更高。
安全省油高效，低噪音平稳运行。

Uniform atomization, high range, wide operating range, higher efficiency.
Safe and fuel-efficient, low noise and smooth operation.

型号 Model	MH-26ZL-1	MH-26ZL-2	MH-30ZL-1
转速(R.P.M) Rpm	800-1200	800-1200	800-1200
吸水量(Output) L/min	22-40	22-40	33-55
工作压力(Pressure) Pa	1-8	1-8	1-8
马力(Motor) HP	168F	168F	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22	3×22	3×30
尺码(Dimension) mm	580×405×430	580×405×430	580×405×430
重量(Weight) kgs	42	42	45

产品特点/Product features

雾化均匀，射程高，作业范围广，效率更高。
安全省油高效，低噪音平稳运行。
Uniform atomization, high range, wide operating range, higher efficiency.
Safe and fuel-efficient, low noise and smooth operation.



型号 Model	MH-50L
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	14-22
工作压力(Pressure) Pa	20-45
马力(Motor) HP	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22
尺码(Dimension) mm	1300×630×760
重量(Weight) kgs	32



型号 Model	MH-60L-1
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	14-22
工作压力(Pressure) Pa	20-45
马力(Motor) HP	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22
尺码(Dimension) mm	740×430×670
重量(Weight) kgs	53



型号 Model	MH-60-2
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	8-10
工作压力(Pressure) Pa	10-25
马力(Motor) HP	TU26
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	2×18
尺码(Dimension) mm	680×350×410
重量(Weight) kgs	42

产品特点/Product features

雾化均匀，射程高，作业范围广，效率更高。
安全省油高效，低噪音平稳运行。
Uniform atomization, high range, wide operating range, higher efficiency.
Safe and fuel-efficient, low noise and smooth operation.



型号 Model	MH-100L
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	14-22
工作压力(Pressure) Pa	0-40
马力(Motor) HP	5.5
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22
尺码(Dimension) mm	920×700×630(内) 940×720×650(外)
重量(Weight) kgs	52



型号 Model	MH-100/120/160/ 180/200L
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	14-22
工作压力(Pressure) Pa	20-45
马力(Motor) HP	168F
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×22
尺码(Dimension) mm	1300×630×730
重量(Weight) kgs	70



型号 Model	MH-300L
转速(R.P.M) Rpm	800-1200
吸水量(Output) L/min	14-22
工作压力(Pressure) Pa	20-45
马力(Motor) HP	168FB
柱塞数X柱塞径(Plunger no. x Dia.) Pcs X mm	3×30
尺码(Dimension) mm	680×350×410
重量(Weight) kgs	100



• Model: MH769

容量 Capacity:15L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension:400 × 330 × 620mm



• Model: MH767-A

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension:400 × 330 × 650mm



• Model: MH767-B

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension:400 × 330 × 650mm



• Model: MH768

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension:400 × 330 × 650mm



• Model: MH708

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension:400 × 330 × 650mm



• Model: MH800

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 445 × 305 × 600mm



• Model: MH800-B

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 445 × 305 × 600mm



• Model: MH900-A

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 485 × 325 × 640mm



• Model: MH900-B

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 485 × 325 × 640mm



• Model: MH909A

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 485 × 400 × 650mm



• Model: MH-435

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 445 × 305 × 600mm



• Model: MH-435B

容量 Capacity:25L
常压 Pressure:0.2-0.3Mpa
包装数量 Quantity:1
尺寸 Dimension: 485 × 400 × 650mm



• Model: MH768P-1

配套动力(Power):TU26
工作压力 (Working Pressure)Mpa: 1.5-2.5
额定流量 (Output)L:3-8L
外型尺寸 (Dimension)mm:430 × 320 × 380
整机形式 (Type):手提式(portable)
整机重量 (Weight)kg:9



• Model: MH768P-2

配套动力(Power):139F
工作压力 (Working Pressure)Mpa: 1.5-2.5
额定流量 (Output)L:12-15L
外型尺寸 (Dimension)mm:450 × 330 × 360
整机形式 (Type):手提式(portable)
整机重量 (Weight)kg:12




• Model: TU-26 • Model: 1E34F • Model: 139F • Model: GX35

型号 Model	TU-26	1E34F	139F	Gx35
Diameter of Cylinder(mm)	33	34	39	39
Discharging Volume(mm)	25.6	26	31	31
Standard Power(kw/r/min)	0.7/6500	0.7/6500	0.7/6500	0.7/6500
Mixed Fuel Ratio	25:1	25:1	25:1	25:1
Fuel Tank Capacity(L)	0.6	1.2	0.9	0.9
Method of Starting	Recoil Staring	Recoil Staring	Recoil Staring	Recoil Staring
Igniting Mode	No Touch of Ignition	No Touch of Ignition	No Touch of Ignition	No Touch of Ignition
Form of Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Weight(kg)	2.4	2.4	4.2	3.33



• Model: 1E40F-5A • Model: 1E40F-6A • Model: 1E40F-6B • Model: 139

型号 Model	1E40F-5A	1E40F-6A	1E40F-6B	139
Diameter of Cylinder(mm)	40	40	40	39
Discharging Volume(mm)	26	26	26	31
Standard Power(kw/r/min)	1.45/7000	1.45/7000	1.45/7000	0.7/6500
Mixed Fuel Ratio	25:1	25:1	25:1	25:1
Fuel Tank Capacity(L)	1.2	1.2	1.2	0.9
Method of Starting	Recoil Staring	Recoil Staring	Recoil Staring	Recoil Staring
Igniting Mode	No Touch of Ignition	No Touch of Ignition	No Touch of Ignition	No Touch of Ignition
Form of Carburetor	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Weight(kg)	4.2	4.2	4.2	4.2

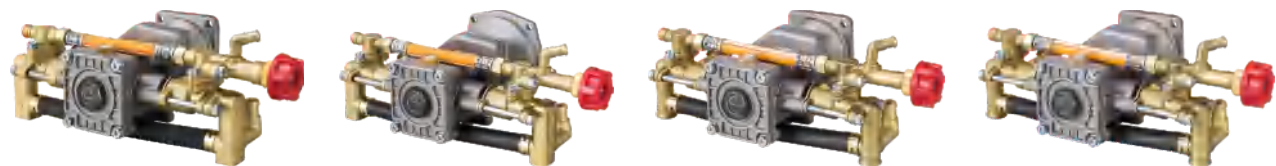

Square aluminum pump Square copper pump Copper pump Aluminum pump

GASOLINE ENGINE PUMP SERIES

汽油机水泵系列

多种用途满足各种日常所需，应用于田园浇灌、果园打药、园林洒水、车辆清洗等。
A variety of uses to meet various daily needs, used in pastoral watering, orchard spraying, garden sprinkling, vehicle cleaning, etc.

ISO9001 CE
[Http://www.menghua.cn](http://www.menghua.cn)




 • Model: MH-MP20X-1
 MH-MP30X-1

 • Model: MH-MP20X-2
 MH-MP30X-2

 • Model: MH-MP20X-3
 MH-MP30X-3

 • Model: MH-MP20X-4
 MH-MP30X-4

 • Model: MH-MP20X-5
 MH-MP30X-5

 • Model: MH-MP20X-6
 MH-MP30X-6

型号 Model	MH-MP20X-1 MH-MP30X-1	MH-MP20X-2 MH-MP30X-2	MH-MP20X-3 MH-MP30X-3	MH-MP20X-4 MH-MP30X-4	MH-MP20X-5 MH-MP30X-5	MH-MP20X-6 MH-MP30X-6
进出口管口径 Suction&Discharge port Dia.(mm)	50(2")/80(3")	50(2")/80(3")	50(2")/80(3")	50(2")/80(3")	50(2")/80(3")	50(2")/80(3")
扬程 Max.Head(m)	26/25	26/25	26/25	26/25	26/25	26/25
吸程 Max.Suction(m)	8	8	8	8	8	8
最大流量 Max.Flow(m³/h)	30/55	30/55	30/55	30/55	30/55	30/55
型号 Engine Model	168FA	168FA	168FA	168FA	168FA	168FA
发动机型式 Engine type	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH
燃料容量 Fuel Tank Capacity(L)	4/3.6	4/3.6	4/3.6	4/3.6	4/3.6	4/3.6
起动方式 Starting System	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter
外形尺寸 Overall Dimension L × W × H(mm)	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465
净重 N.W/G.W(kg)	21/23	21/23	21/23	21/23	21/23	21/23


 • Model: MH-MP20X-7
 MH-MP30X-7

 • Model: MH-MP20K
 MH-MP30K


• Model: MH168F-15H


 • Model: MH-RB20X
 MH-RB30X


• Model: MH-MP40X-1



• Model: MH-MP40X-2

型号 Model	MH-MP20X-7 MH-MP30X-7	MH-MP20K MH-MP30K	MH168F-15H	MH-RB20X MH-RB30X	MH-MP40X-1	MH-MP40X-2
进出口管口径 Suction&Discharge port Dia.(mm)	50(2")/80(3")	50(2")/80(3")	80(3")	50(2")/80(3")	100(4")	100(4")
扬程 Max.Head(m)	26/25	26/25	25	26/25	25	25
吸程 Max.Suction(m)	8	8	8	8	8	8
最大流量 Max.Flow(m³/h)	30/55	30/55	55	30/55	80	80
型号 Engine Model	168FA	168FA	168FB	EY20	170F	188F
发动机型式 Engine type	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH
燃料容量 Fuel Tank Capacity(L)	4/3.6	4/3.6	3.6	4/3.6	3.6	6.5
起动方式 Starting System	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter
外形尺寸 Overall Dimension L × W × H(mm)	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	510 × 390 × 465	640 × 465 × 525
净重 N.W/G.W(kg)	21/23	21/23	23	24/25	29	50



Model: MH-MP10XA



Model: MH-MP10XB



Model: MH-MP10XC



Model: MH-MP15XA



Model: MH-MP15XB

型号 Model	MH-MP10XA	MH-MP10XB	MH-MP10XC	MH-MP15XA	MH-MP15XB
进出口管口径 Suction&Discharge port Dia.(mm)	25.4(1inch)	25.4(1inch)	25.4(1inch)	25.4(1inch)	25.4(1inch)
扬程 Max.Head(m)	22	22	22	22	22
吸程 Max.Suction(m)	7	7	7	7	7
最大流量 Max.Flow(m³/h)	8	8	8	8	8
型号 Engine Model	40-5	431	40-5	40-5	431
发动机型式 Engine type	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH	Forced air-cooled, 4-stroke OH
燃料容量 Fuel Tank Capacity(L)	3.6	3.6	3.6	3.6	3.6
起动方式 Starting System	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter
外形尺寸 Overall Dimension L × W × H(mm)	400x300x300	400x300x300	400x300x300	400x300x300	400x300x300
净重 N.W/G.W(kg)	7.3	7.3	7.3	7.3	7.3

电机水泵系列
Motor Pump Series



Model: MH-50C



Model: MH-80C

型号 Model	MH-50C	MH-80C
进出口管口径 Suction&Discharge port Dia.(mm)	800-1200	800-1200
扬程 Max.Head(m)	65-80	33-55
吸程 Max.Suction(m)	1-5	1-5
最大流量 Max.Flow(m³/h)	3-7.5	65-7
功率 Power(kW)	3×34	4×30×20
转速 R.P.M(r/min)	435×370×450	425×360×445
电压/频率 Electric	19	18.5

振动泵系列
Vibrator Series



Model: MH-ZB50



Model: MH-RB50

频率Frequency(Hz)	50	Type	Air-cooleb.4-cycle.single cylinder.side valve
最大输出 Max Ac Output(kw)	2.3	Dated output KW(HP)/rpm	2.65(3.5)/3600
额定输出 Rated Ac Output (kw)	2	Max output KW(HP)/rpm	3.73(5.0)/4000
燃料容量Fuel Tank Capacity(L)	4	Direction ofrotation	P.T.O.Counterclock Wise.facing PTO shaft
发动机型式 Engine type	168F	Fule	Automobile Gasoline Unleaded
点火方式System	recoil starter	Fuel Tank Capacity(L)	3.8
噪音Noise level(7m)dB(A)	64	Spark plug	E6TC
外形尺寸Overall Dimension L × W × H(mm)	520 × 400 × 425	Starting System	Recoil starter
净重 N.W/G.W(kg)	18	Packing size(L × W × H)mm	520 × 370 × 480
		Netweight(LG)	18
		STD20/STD40	450/900(1SET/1CARTON 540/1080)



• Model: MH-SU50



• Model: MH-SU80



PLASTIC CONNECTOR

ALUMINUM CONNECTOR



• Model: MH-SU100

型号 Model	MH-SU50	MH-SU80	MH-SU100
出水口径 Outlet Size(mm)	50	80	100
进水口径 Inlet Size(m)	50	80	100
最大功率 Max.Output(HP)	5.5	6.5	13
转速 Speed(rpm)	3600	3600	3600
排水量 Displacement Q.Max(m³/h)	25	40	130
扬程 Litf H.Max(m)	36	36	25
吸程 Suction(m)	7	7	6



• Model: MH-SNB50



• Model: MH-SNB80



• Model: MH-SNB50N



• Model: MH-SNB80N



• Model: MH-SNB100



• Model: MH-SNB100S

型号 Model	MH-SNB50	MH-SNB80	MH-SNB50N	MH-SNB80N	MH-SNB100	MH-SNB100S
出水口径 Outlet Size(mm)	50	80	50	80	100	100
进水口径 Inlet Size(m)	50	80	50	80	100	100
最大功率 Max.Output(HP)	5.5	6.5	5.5	6.5	13	7
转速 Speed(rpm)	3600	3600	3600	3600	3600	3600
排水量 Displacement Q.Max(m³/h)	25	40	25	40	130	130
扬程 Litf H.Max(m)	36	36	36	36	25	25
吸程 Suction(m)	7	7	7	7	6	6

ENGINE SERIES

发动机系列

多种用途满足各种日常所需，应用于田园浇灌、果园打药、园林洒水、车辆清洗等。
A variety of uses to meet various daily needs, used in pastoral watering, orchard spraying, garden sprinkling, vehicle cleaning, etc.

ISO9001 CE
[Http://www.menghua.cn](http://www.menghua.cn)



Engine Series 发动机系列



• Model: MH168F-1



• Model: MH168F-2



• Model: MH168F-3



• Model: MH168F-4

Model	MH168F-1	MH168F-2	MH168F-3	MH168F-4
Engine Type	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV
Bore × Stroke (mm)	68 × 45	68 × 45	68 × 45	68 × 45
Displacement (cc)	163	163	163	163
Compression Ration	8:5:1	8:5:1	8:5:1	8:5:1
Max. Output (Hp/rpm)	6.5/3600	6.5/3600	6.5/3600	6.5/3600
Max. Torque (N.M/rpm)	1.1/2500	1.1/2500	1.1/2500	1.1/2500
Ignition System	T.C.L.	T.C.L.	T.C.L.	T.C.L.
Starting System	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)
Fuel	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline
Fuel Tank Capacity (L)	3.6	3.6	3.6	3.6
Fuel Consumption (g/Hp.h)	230	230	230	230
Oil	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)
Oil capacity (L)	0.6	0.6	0.6	0.6
Overall Dimension L × W × H (mm)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)
N.W. (kg)	15	15	15	15



• Model: MH168F-5



• Model: MH168F-6



• Model: MH168F-7



• Model: MH168F-8

Model	MH168F-5	MH168F-6	MH168F-7	MH168F-8
Engine Type	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV
Bore × Stroke (mm)	68 × 45	68 × 45	68 × 45	68 × 45
Displacement (cc)	163	163	163	163/196
Compression Ratio	8.5:1	8.5:1	8.5:1	8.5:1
Max. Output (Hp/rpm)	6.5/3600	6.5/3600	6.5/3600	6.5/3600
Max. Torque (N.M/rpm)	1.1/2500	1.1/2500	1.1/2500	1.1/2500 / 1.3/2500
Ignition System	T.C.L.	T.C.L.	T.C.L.	T.C.L.
Starting System	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)
Fuel	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline
Fuel Tank Capacity (L)	3.6	3.6	3.6	3.6
Fuel Consumption (g/Hp.h)	230	230	230	230
Oil	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)
Oil capacity (L)	0.6	0.6	0.6	0.6
Overall Dimension L × W × H (mm)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)
N.W. (kg)	16	16	16	16



• Model: MH168F-9



• Model: MH168F-10



• Model: MH168F-11



• Model: MH168F-12

Model	MH168F-9	MH168F-10	MH168F-11	MH168F-12
Engine Type	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV
Bore × Stroke (mm)	68 × 45	68 × 45	68 × 45	68 × 45
Displacement (cc)	163	163	163	163/196
Compression Ratio	8.5:1	8.5:1	8.5:1	8.5:1
Max. Output (Hp/rpm)	6.5/3600	6.5/3600	6.5/3600	6.5/3600
Max. Torque (N.M/rpm)	1.1/2500	1.1/2500	1.1/2500	1.1/2500 / 1.3/2500
Ignition System	T.C.L.	T.C.L.	T.C.L.	T.C.L.
Starting System	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)
Fuel	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline	Unleaded Gasoline
Fuel Tank Capacity (L)	3.6	3.6	3.6	3.6
Fuel Consumption (g/Hp.h)	230	230	230	230
Oil	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)
Oil capacity (L)	0.6	0.6	0.6	0.6
Overall Dimension L × W × H (mm)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)
N.W. (kg)	16	16	16	16


Model: MH168F-13

Model: MH168F-14

Model	MH168F-13	MH168F-14
Engine Type	Forced air-cooled, 4-stroke, OHV	Forced air-cooled, 4-stroke, OHV
Bore × Stroke(mm)	68 × 45	68 × 45
Displacement(cc)	163	163
Compression Ration	8.5:1	8.5:1
Max. Output(Hp/rpm)	6.5/3600	6.5/3600
Max. Torque(N.M/rpm)	1.1/2500	1.1/2500
Ignition System	T.C.L.	T.C.L.
Starting System	Recoil Starter (Recoil+Electric Starter)	Recoil Starter (Recoil+Electric Starter)
Fuel	Unleaded Gasoline	Unleaded Gasoline
Fuel Tank Capacity(L)	3.6	3.6
Fuel Consumption(g/Hp.h)	230	230
Oil	SAE 10W30 (Above CC grade)	SAE 10W30 (Above CC grade)
Oil capacity(L)	0.6	0.6
Overall Dimension L × W × H(mm)	370 × 310 × 335 (395 × 340 × 350)	370 × 310 × 335 (395 × 340 × 350)
N.W.(kg)	16	16


Model:
 MH-168FA-HALF
 MH-168FB-HALF
 MH-188F-HALF

型号 Model	MH-168FA-HALF	MH-168FB-HALF	MH-188F-HALF
Frequency(Hz)	50/60	50/60	50/60
Rated AC Output(kW)	2kW	2kW	5kW
Max. AC Output(kW)	2.2kW	2.2kW	5.5kW
Rated AC Voltage(V)	120/240	120/240	120/240
DC Output	12V/8.3A	12V/8.3A	12V/23A
Engine type	Forced air-cooled 4-stroke OHV		
Starting System	Recoil Start/Electric Start		
Dimension L×W×H(mm)	390×325×260	390×325×260	500×410×375
N.W./G.W.(kg)	12/13	12/13	29/30


Model: MH188F-A

Model	MH188F-A
Engine Type	Singel cylinder, OHV, 25, 4-stroke, Air-cooled
Bore × Stroke(mm)	90×66
Displacement(cc)	390
Compression Ration	8.5:1
Max. Output(Hp/rpm)	13.0/3600
Max. Torque(N.M/rpm)	10.5/2500
Ignition System	T.C.L.
Starting System	Manual Electric/Manual
Fuel	Semi-dry type
Fuel Tank Capacity(L)	6.5
Fuel Consumption(g/Hp.h)	365
Oil	SAE 10W30 (Above CC grade)
Oil capacity(L)	1.1
Overall Dimension L × W × H(mm)	480×400×430
N.W.(kg)	34


Model: MH188F-B

Model	MH188F-B
Engine Type	Singel cylinder, OHV, 25, 4-stroke, Air-cooled
Bore × Stroke(mm)	90×66
Displacement(cc)	390
Compression Ration	8.5:1
Max. Output(Hp/rpm)	13.0/3600
Max. Torque(N.M/rpm)	10.5/2500
Ignition System	T.C.L.
Starting System	Manual Electric/Manual
Fuel	Semi-dry type
Fuel Tank Capacity(L)	6.5
Fuel Consumption(g/Hp.h)	365
Oil	SAE 10W30 (Above CC grade)
Oil capacity(L)	1.1
Overall Dimension L × W × H(mm)	480×400×430
N.W.(kg)	34


Model: MH-EY20

型号 Model	MH-EY20
Engine type	1-cylinder, 4-stroke, air-cooled gasoline engine
Engine model	Gasoline engine Ey20
Work capacity	163cc
Max. output	5.5Hp/400rpm
Ignition system	Recoil
Fuel tank capacity	4Liter
Continuous operating time	5hours
Engine oil system capacity	0.6Liter
Dimension L×W×H(mm)	330×320×395
Net weight	16kg


Model: MHW3000

Gasoline pressure washer

Working Pressure: 206Mpa (3000PSI)

Flow: 12L/min (2.65GPM)

Displacement(ml): 208, 5m hose, gasoline engine (7hp)

Model	MHW3000
Packing	Brown carton
QTY/CTN	20GP/158 40GP/320
CTN Size(cm)	64 × 50 × 58
N.W (kgs)	45
G.W(kgs)	48

GASOLINE GENERATOR SERIES

汽油发电机系列

多种用途满足各种日常所需，应用于田园浇灌、果园打药、园林洒水、车辆清洗等。
A variety of uses to meet various daily needs, used in pastoral watering, orchard spraying, garden sprinkling, vehicle cleaning, etc.

ISO9001 CE
Http://www.menghua.cn



Gasoline Generator Series 汽油发电机系列



• Model: MH950-A



• Model: MH950B



• Model: MH1500-A



• Model: MH1500-B

型号 Model	MH950-A	MH950-B	MH1500-A	MH1500-B
频率Frequency(Hz)	50/60	50/60	50/60	50/60
最大输出 Max Ac Output (kw)	0.8/0.8	0.8/0.8	0.85/1.0	0.85/1.0
额定输出 Rated Ac Output (kw)	0.65/0.7	0.65/0.7	0.8/0.85	0.8/0.85
额定电压 Rated AC Voltage(V)	110.220.230.240	110.220.230.240	110.220.230.240	110.220.230.240
类型 Type	Brushless,Self-exciation, 2-pole-phase	Brushless,Self-exciation, 2-pole-phase	Brushless,Self-exciation, 2-pole-phase	Brushless,Self-exciation, 2-pole-phase
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	1E45	1E45	154F	154F
发动机型式 Engine type	Forced air-cooled, 2-stroke	Forced air-cooled, 2-stroke	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料 Fuel	Unleaded Gasoline and Oil Mixture(50:1)	Unleaded Gasoline and Oil Mixture(50:1)		
燃料容量 Fuel Tank Capacity(L)	4.2	4.2	4.8	4.8
点火方式 Starting System	Recoil Starter	Recoil Starter	Recoil Starter	Recoil Starter
噪音 Operating Noise level(7m)dB(A)	60/61	60/61	63/65	63/65
外形尺寸 Overall Dimension L×W×H(mm)	380×320×325	375×320×325	465×370×380	465×370×380
净重 N.W/G.W(kg)	16/17	16/17	22/23	22/23



Model: MH1500-C



Model: MH-2500-A
MH-3500-A



Model: MH-2500-B
MH-3500-B



Model: MH-2500-C
MH-3500-C

型号 Model	MH1500-C	MH-2500-A MH-3500-A	MH-2500-B MH-3500-B	MH-2500-C MH-3500-C
频率Frequency(Hz)	50/60	50/60	50/60	50/60
最大输出 Max Ac Output(kw)	0.85/1.0	2.1-2.2/2.3-2.5	2.1-2.2/2.3-2.5	2.1-2.2/2.3-2.5
额定输出 Rated Ac Output (kw)	0.8/0.85	1.8-2.0/2.2-2.3	1.8-2.0/2.2-2.3	1.8-2.0/2.2-2.3
额定电压 Rated AC Voltage(V)	110.220.230.240	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.
类型 Type	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase
电压控制 Voltage Regulate		Capacitance & AVR	Capacitance & AVR	Capacitance & AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	154F	168F	168F	168F
发动机型式 Engine type	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料容量 Fuel Tank Capacity(L)	4.8	12	12	12
点火方式 Starting System	Recoil Starter	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)
噪音 Operating Noise level(7m)dB(A)	63/65	65/68	65/68	65/68
外形尺寸 Overall Dimension L×W×H(mm)	465×370×380	605×440×455	605×440×455	605×440×455
净重 N.W/G.W(kg)	22/23	35/36	35/36	35/36



Model: MH-2500-D
MH-3500-D



Model: MH-2500-E
MH-3500-E



Model: MH-2500-F
MH-3500-F



Model: MH-2500-G
MH-3500-G

型号 Model	MH-2500-D MH-3500-D	MH-2500-E MH-3500-E	MH-2500-F MH-3500-F	MH-2500-G MH-3500-G
频率Frequency(Hz)	50/60	50/60	50/60	50/60
最大输出 Max Ac Output(kw)	2.1-2.2/2.3-2.5	2.1-2.2/2.3-2.5	2.3/2.5	2.3/2.5
额定输出 Rated Ac Output (kw)	1.8-2.0/2.2-2.3	1.8-2.0/2.2-2.3	2.0/2.3	2.0/2.3
额定电压 Rated AC Voltage(V)	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.
类型 Type	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase	Brushless.Self-exciation. 2-pole-phase
电压控制 Voltage Regulate	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	168F	168F	168F	168F
发动机型式 Engine type	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料容量 Fuel Tank Capacity(L)	12	12	12	12
点火方式 Starting System	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)
噪音 Operating Noise level(7m)dB(A)	65/68	65/68	65/68	65/68
外形尺寸 Overall Dimension L×W×H(mm)	605×440×455	605×440×455	605×440×455	605×440×455
净重 N.W/G.W(kg)	35/36	35/36	35/36	35/36



Model: MH-2500-H
MH-3500-H



Model: MH-2500-I
MH-3500-I



Model: MH-2500-J
MH-3500-J



Model: MH-2500-K
MH-3500-K

型号 Model	MH-2500-H MH-3500-H	MH-2500-I MH-3500-I	MH-2500-J MH-3500-J	MH-2500-K MH-3500-K
频率Frequency(Hz)	50/60	50/60	50/60	50/60
最大输出 Max Ac Output(kw)	2.3/2.5	2.3/2.5	2.3/2.5	2.3/2.5
额定输出 Rated Ac Output (kw)	2.0/2.3	2.0/2.3	2.0/2.3	2.0/2.3
额定电压 Rated AC Voltage(V)	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.
类型 Type	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase
电压控制 Voltage Regulate	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	168F	168F	168F	168F
发动机型式 Engine type	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料容量 Fuel Tank Capacity(L)	12	12	12	12
点火方式 Starting System	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)
噪音 Operating Noise level(7m)dB(A)	65/68	65/68	65/68	65/68
外形尺寸 Overall Dimension L × W × H(mm)	605 × 440 × 455	605 × 440 × 455	605 × 440 × 455	605 × 440 × 455
净重 N.W/G.W(kg)	35/36	35/36	35/36	35/36



Model: MH-2500-L
MH-3500-L



Model: MH-2500-M
MH-3500-M



Model: MH-2500-N
MH-3500-N



Model: MH-2500-O
MH-3500-O

型号 Model	MH-2500-L MH-3500-L	MH-2500-M MH-3500-M	MH-2500-N MH-3500-N	MH-2500-O MH-3500-O
频率Frequency(Hz)	50/60	50/60	50/60	50/60
最大输出 Max Ac Output(kw)	2.3/2.5	2.3/2.5	2.3/2.5	2.3/2.5
额定输出 Rated Ac Output (kw)	2.0/2.3	2.0/2.3	2.0/2.3	2.0/2.3
额定电压 Rated AC Voltage(V)	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.
类型 Type	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase	Brushless.Self-excitation. 2-pole-phase
电压控制 Voltage Regulate	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR	Capacitance & AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	168F	168F	168F	168F
发动机型式 Engine type	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料容量 Fuel Tank Capacity(L)	12	12	12	12
点火方式 Starting System	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)	Recoil (electric Starter)
噪音 Operating Noise level(7m)dB(A)	65/68	65/68	65/68	65/68
外形尺寸 Overall Dimension L × W × H(mm)	605 × 440 × 455	605 × 440 × 455	605 × 440 × 455	605 × 440 × 455
净重 N.W/G.W(kg)	35/36	35/36	35/36	35/36



型号 Model	MH-2500-P MH-3500-P	MH-2500-Q MH-3500-Q	MH-5000-A MH-6500-A	MH6500-A	MH6500-B	MH6500DX
频率Frequency(Hz)	50/60	50/60	50/60	50/60	50/60	50/60
最大输出 Max Ac Output (kw)	2.3/2.5	2.3/2.5	4.5/5.0	5.5/6.0	5.5/6.0	5.5/6.0
额定输出 Rated Ac Output (kw)	2.0/2.3	2.0/2.3	4.2/4.6	5.0/5.5	5.0/5.5	5.0/5.5
额定电压 Rated AC Voltage(V)	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	220/380	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.	110.220.230.240. 110/220.120/240.
类型 Type	Brushless.Self-exciation 2-pole-phase	Brushless.Self-exciation 2-pole-phase	Brushless.Self-exciation 2-pole-phase	Brushless.Self-exciation 2-pole-phase	Brushless.Self-exciation 2-pole-phase	Brushless.Self-exciation 2-pole-phase
电压控制 Voltage Regulate	Capacitance&AVR	Capacitance&AVR	Capacitance&AVR	Capacitance&AVR	Capacitance&AVR	Capacitance&AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/10A	12V/8.3A	12V/8.3A	12V/8.3A
发动机型号 Engine Model	168F	168F	186F	188F	188F	188F
发动机型式 Engine type	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke,diesel engine	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV	Forced air-cooled, 4-stroke OHV
燃料容量 Fuel Tank Capacity(L)	12	12	16	2	22	22
点火方式 Starting System	Recoil (electric Starter)	Recoil (electric Starter)	Electric Starter	Recoil(electric Starter)	Recoil(electric Starter)	Recoil(electric Starter)
噪音 Operating Noise level(7m)dB(A)	65/68	65/68	69/70	75/77	75/77	75/77
外形尺寸 Overall Dimension L×W×H(mm)	605×440×455	605×440×455	880×515×695	690×525×570	690×525×570	690×525×570
净重 N.W/G.W(kg)	35/36	35/36	131/141	84/86	84/86	84/86



型号 Model	MH-3000DX-A	MH-3000DX-B	MH5000LM
频率Frequency(Hz)	50/60	50/60	50/60
最大输出 Max Ac Output (kw)	3.3/3.5	3.3/3.5	4.5/5.0
额定输出 Rated Ac Output (kw)	2.8/3.3	2.8/3.3	4.2/4.6
额定电压 Rated AC Voltage(V)	220/380	220/380	220/380
类型 Type	Brushless.Self-exciation, 2-pole-phase,3-phase	Brushless.Self-exciation, 2-pole-phase,3-phase	Brushless.Self-exciation. 2-pole-phase
电压控制 Voltage Regulate	Capacitance&AVR	Capacitance&AVR	Capacitance&AVR
直流输出 DC Output	12V/8.3A	12V/8.3A	12V/10A
发动机型号 Engine Model	178F	178F	186F
发动机型式 Engine type	Forced air-cooled, 4-stroke .diesel engine	Forced air-cooled, 4-stroke .diesel engine	Forced air-cooled, 4-stroke,diesel engine
燃料容量 Fuel Tank Capacity(L)	14	14	16
点火方式 Starting System	Recoil(electric Starter)	Recoil(electric Starter)	Electric Starter
噪音 Operating Noise level(7m)dB(A)	81/83	81/83	69/70
外形尺寸 Overall Dimension L×W×H(mm)	680×465×555	680×465×555	880×515×695
净重 N.W/G.W(kg)	75/78	75/78	131/141



• Model: **MH-411A**

型号 Model	MH-411A
发动机型号/Engine model No	1E40F-6
汽油机形式/Engine type	单缸风冷二冲程
最大功率/Max power	1.47kw
排量/Displacement	40.2cc
怠速/Low speed	2800-3300r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	无触点电子点火(CDI)
燃油混合比/Fuel mixing ratio	1:35
燃油箱容积/Fuel tank capacity	1200ml



• Model: **MH-411B**

型号 Model	MH-411B
发动机型号/Engine model No	1E40F-6
汽油机形式/Engine type	风冷二冲程(单缸)汽油机
最大功率/Max power	1.55kw
排量/Displacement	40.2cc
怠速/Low speed	2800r/min
化油器/Carburetor	浮子式
点火方式/Ignition type	常规点火
燃油混合比/Fuel mixing ratio	25:1
燃油箱容积/Fuel tank capacity	1000ml



• Model: **MH-330**

型号 Model	MH-330
发动机型号/Engine model No	1E36F-2A
汽油机形式/Engine type	单缸风冷二冲程
最大功率/Max power	0.9kw
排量/Displacement	32.6cc
怠速/Low speed	2800r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	无触点电子点火(CDI)
燃油混合比/Fuel mixing ratio	25:1
燃油箱容积/Fuel tank capacity	1000ml



• Model: **MH-430**

型号 Model	MH-430
发动机型号/Engine model No	1E40F-5
汽油机形式/Engine type	单缸风冷二冲程
最大功率/Max power	1.25kw
排量/Displacement	43cc
怠速/Low speed	2800-3300r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	手拉自回绳启动
燃油混合比/Fuel mixing ratio	1:25
燃油箱容积/Fuel tank capacity	1200ml



• Model: **MH-139**

型号 Model	MH-139
发动机型号/Engine model No	1E139F
汽油机形式/Engine type	单缸风冷四冲程
最大功率/Max power	0.75kw
排量/Displacement	31cc
怠速/Low speed	2800-3300r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	手拉自回绳启动
燃油混合比/Fuel mixing ratio	(严禁使用混合燃油)
燃油箱容积/Fuel tank capacity	650ml



• Model: **MH-650**

型号 Model	MH-650
发动机型号/Engine model No	1E40F-5
汽油机形式/Engine type	风冷二冲程(单缸)
最大功率/Max power	1.75kw
排量/Displacement	43.2cc
怠速/Low speed	2800r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	手拉自回绳启动
燃油混合比/Fuel mixing ratio	25:1
燃油箱容积/Fuel tank capacity	1150ml



• Model: **MH-140F**

型号 Model	MH-140F
发动机型号/Engine model No	Gx35
汽油机形式/Engine type	单缸风冷四冲程
最大功率/Max power	1.0kw
排量/Displacement	31cc
怠速/Low speed	2800r/min
化油器/Carburetor	膜片式
点火方式/Ignition type	手拉自回绳启动
燃油混合比/Fuel mixing ratio	(严禁使用混合燃油)
燃油箱容积/Fuel tank capacity	800ml



• Model: **MH-ED430**

型号 Model	MH-ED430	MH-ED520
发动机型号/Engine model No	1E40F	1E44F
发动机形式/Engine type	风冷两冲程(单缸汽油机)	风冷两冲程(单缸汽油机)
发动机功率/Engine power	1.25KW/6500r/min	1.45KW/6500r/min
排量/Displacement	42.7cc	51.7cc
化油器/Carburetor	膜片式	膜片式
启动方式/Starting method	手拉自回绳启动	手拉自回绳启动
可选钻头/Optional driller	100mm/150mm 200mm/300mm	100mm/150mm 200mm/300mm
传动方式/Driving model	齿轮传动	齿轮传动
传动比/Driving rate	30:1	30:1
毛重净重/G/N.weight	16kgs/15kgs	6.5kgs/5.5kgs
包装尺寸/Size of package	320×410×310mm 810×150×150mm	320×410×310mm 810×150×150mm

• Model: **MH-ED520**



• Model: **MH-101**

高编织管HIGH BRAIDED HOSE

内径 Inner dia(mm)	壁厚 Thickness(mm)	爆破压力 Burst pressure(kg/cm ²)
6.5	2.5-3.0	200
7.5	2.5-3.0	200
8.5	2.5-3.0	200
10	2.5-3.0	140
13	2.5-3.0	100

可选颜色/Optional color



• Model: **MH-102**

三胶两线管 5 LAYERS HOSE

内径 Inner dia(mm)	壁厚 Thickness(mm)	爆破压力 Burst pressure(kg/cm ²)
6.5	2.5-3.0	200
7.5	2.5-3.0	200
8.5	2.5-3.0	200
10	2.5-3.0	140
13	2.5-3.0	100

可选颜色/Optional color




• Model: **MH-103**

普通单线管 3 LAYERS HOSE

内径 Inner dia(mm)	壁厚 Thickness(mm)	爆破压力 Burst pressure(kg/cm ²)
6.5	2.5-3.0	200
7.5	2.5-3.0	150
8.5	2.5-3.0	150
10	2.5-3.0	120
13	2.5-3.0	90



可选颜色/Optional color

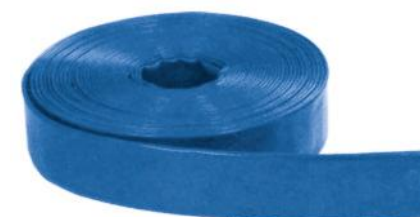

尺寸 Size(inch)	内径 Diameter(mm)	2Bar kg/m	3Bar kg/m	4Bar kg/m	6Bar kg/m	8Bar kg/m	10Ba kg/m
1"	25.4 ± 1.3	0.12	0.13	0.14	0.155	0.17	0.185
1-1/4"	31.8 ± 1.3	0.14	0.15	0.175	0.195	0.21	0.23
1-1/2"	38.1 ± 1.5	0.18	0.2	0.24	0.27	0.3	0.32
2"	50.3 ± 2.0	0.24	0.3	0.35	0.375	0.39	0.42
2-1/2"	63.5 ± 2.3	0.32	0.38	0.45	0.48	0.52	0.55
3"	76.2 ± 2.3	0.38	0.47	0.57	0.63	0.69	
4"	101.6 ± 2.5	0.52	0.58	0.72	0.8	0.9	
5"	121.0 ± 2.8	0.75	0.85	0.95	1.1	1.2	
6"	152.4 ± 3.0	0.9	1.05	1.2	1.4	2.1	
8"	203.2 ± 3.5	1.45	1.55	1.7	1.9	2.6	
10"	254.1 ± 4.0	2.3	2.5	2.75			
12"	304.8 ± 4.5	3.0	3.6	4.0			



尺寸 Size(inch)	内径 Diameter(mm)	2Bar kg/m	3Bar kg/m	4Bar kg/m	6Bar kg/m	8Bar kg/m	10Ba kg/m
20	20 ± 1.0	0.09	0.12	0.13	0.14	0.155	0.17
30	30 ± 1.3	0.125	0.145	0.17	0.185	0.2	0.22
35	35 ± 1.3	0.155	0.18	0.22	0.25	0.27	0.29
40	40 ± 1.5	0.18	0.21	0.25	0.28	0.315	0.33
45	45 ± 1.8	0.20	0.26	0.31	0.33	0.355	0.37
53	53 ± 2.0	0.23	0.31	0.36	0.385	0.40	0.43
60	60 ± 2.1	0.27	0.36	0.44	0.49	0.51	0.54
70	70 ± 2.2	0.32	0.45	0.56	0.62	0.68	0.73
80	80 ± 2.4	0.37	0.49	0.60	0.66	0.72	
90	90 ± 2.3	0.43	0.53	0.66	0.73	0.80	
110	110 ± 2.4	0.55	0.64	0.80	0.9	1.1	

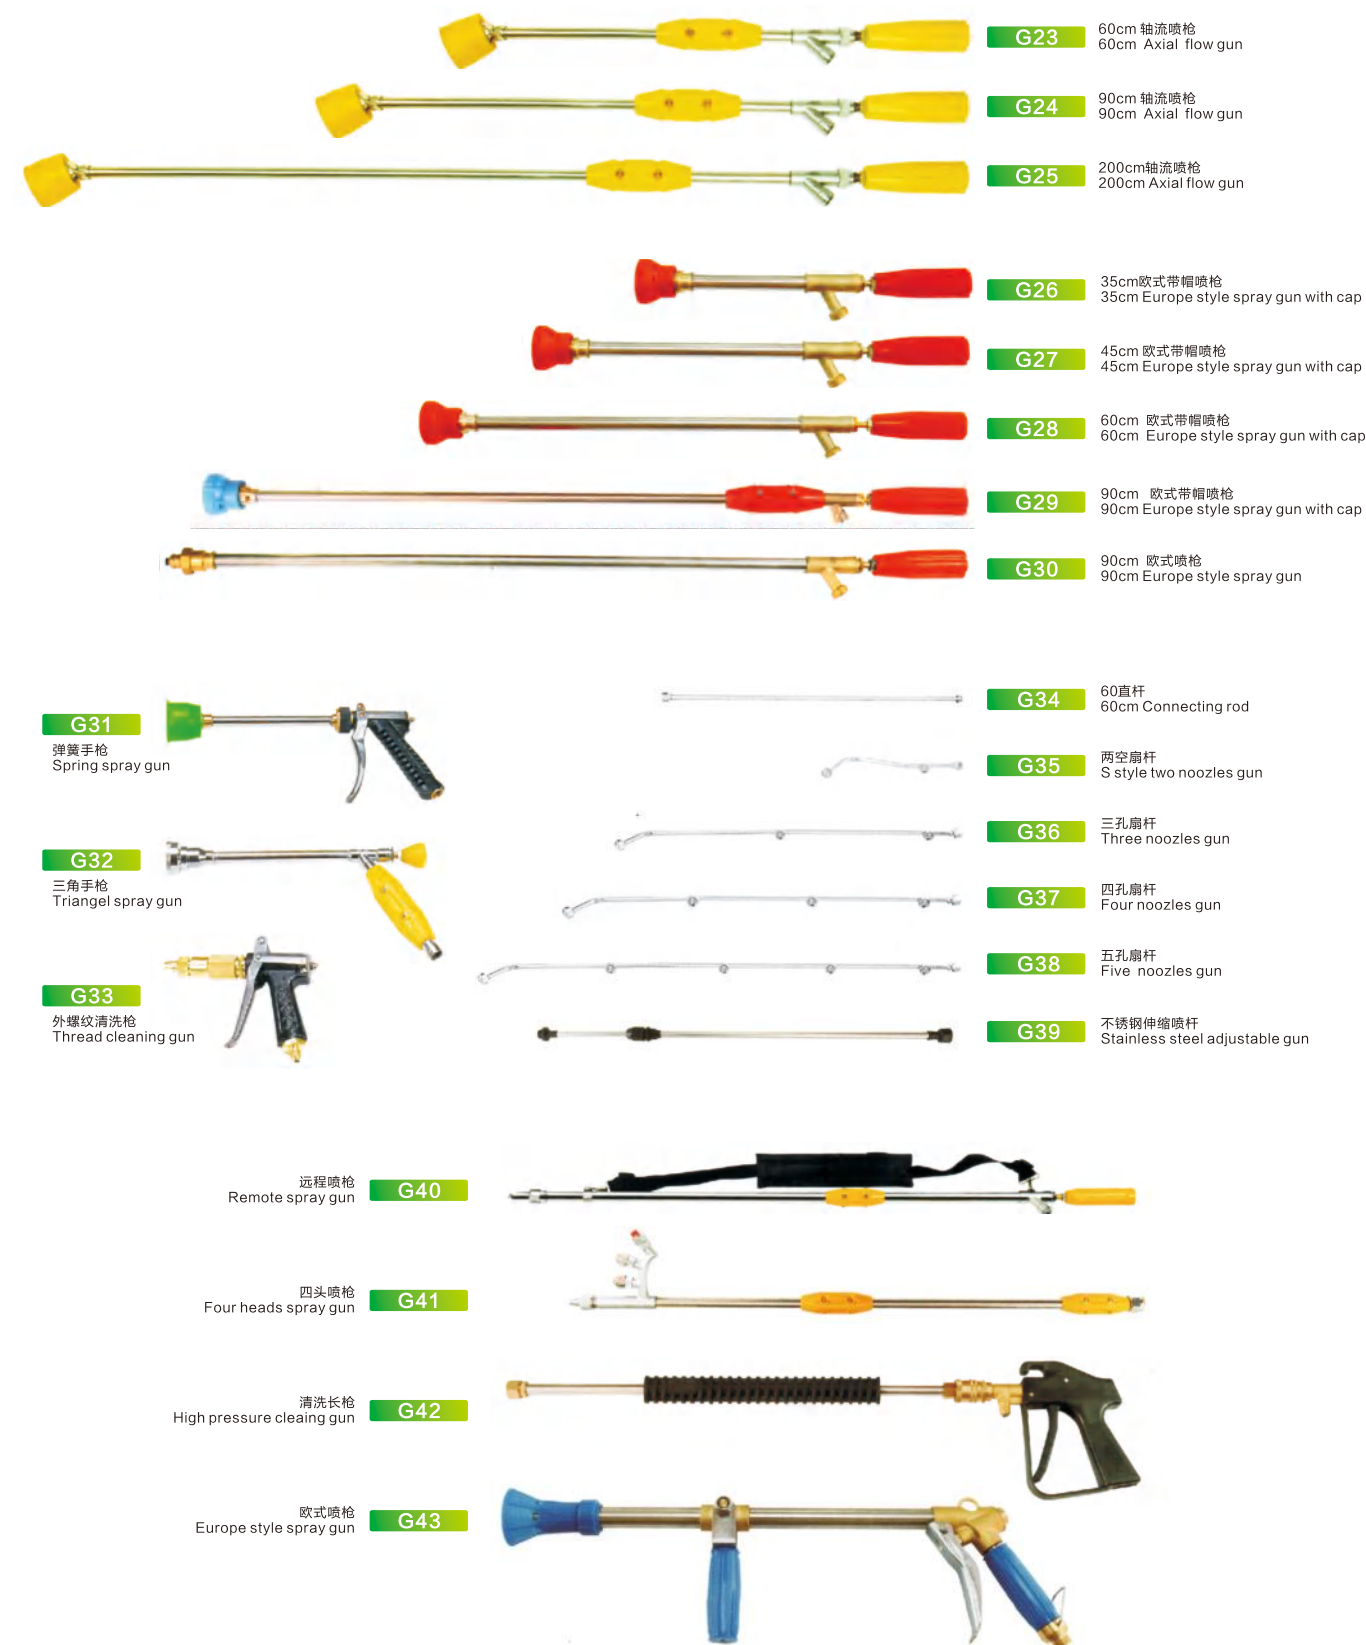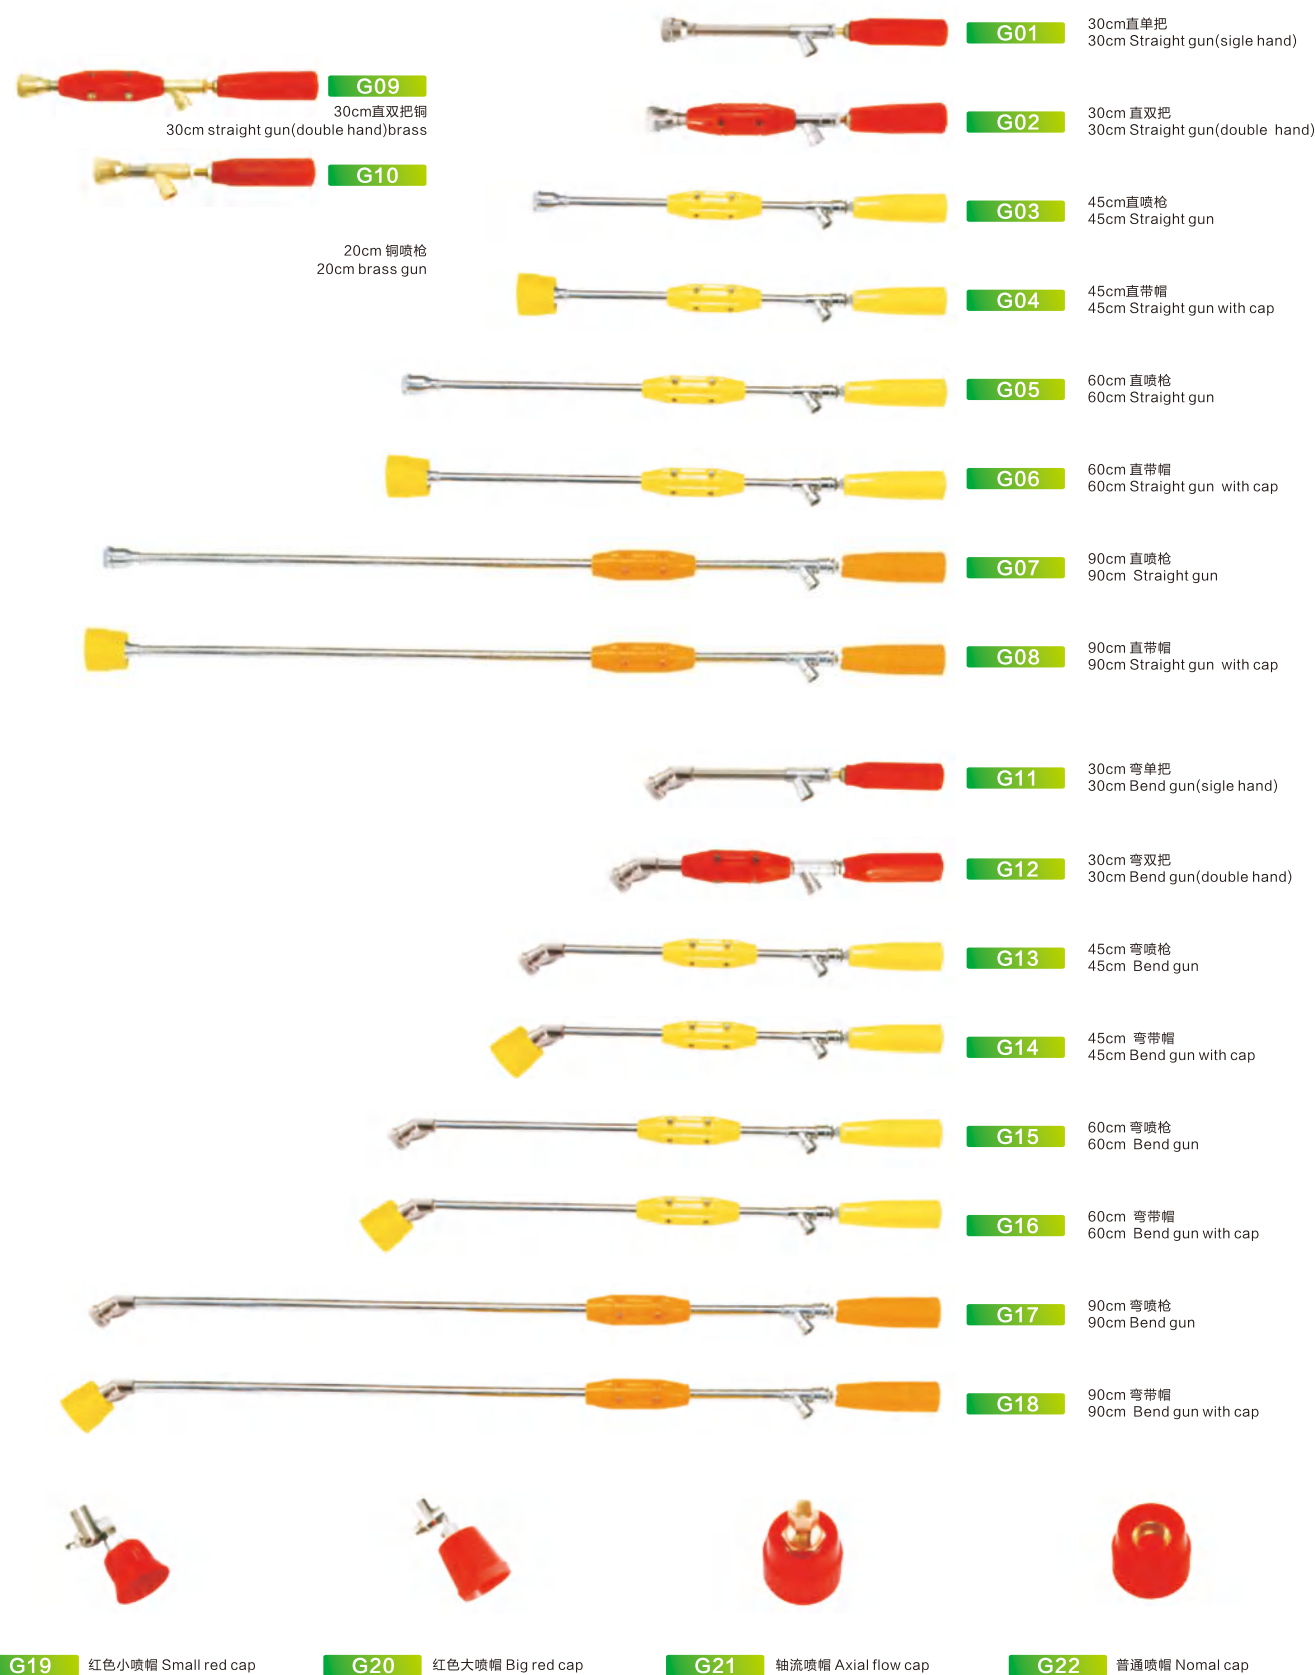

柱塞泵零配件
 Spare Parts For Power Sprayer

柱塞泵零配件
 Spare Parts For Power Sprayer


背负式动力喷雾器配件系列
Knapsack Power Sprayer Accessories Series

139汽油机配件
Gasoline Engine, Spare Parts


汽油发动机配件

Gasoline Engine Spare Parts

汽油发电机配件

Gasoline generator accessories

汽油水泵配件

Gasoline water pump spare parts



MH-W01
泵体座 Pump cover



MH-W02
进水口 Water inlet



MH-W03
出水口 Water outlet



MH-W04
皮带轮 pulley



MH-W05
泵壳 body



MH-W06
箱盖(低)Crankcase cover(low)



MH-W07
进出水口接头(铝)
Water in/Ex joint(AL)



MH-W08
扳手 Spanner



MH-W09
水泵化油器
Water pump carburetor



MH-W10
化油器带油杯
Carburetor with fuel cup



MH-W11
水泵熄火开关(单线)
Stop switch(single)



MH-W12
水泵熄火开关(双线)
Stop switch(double)



MH-F13
高压包
High pressure package



MH-F14
磁飞轮Magnetic flywheel



MH-W15
曲轴(键槽)
Crankshaft(rectangle)



MH-W16
曲轴(螺线)
Crankshaft(whorl)



MH-W17
YP20水封
Water seal(YP20)



MH-W18
ET1500水封
Water seal(ET1500)



MH-W19
YP30水封
Water seal(YP30)



MH-W20
大密封圈
Big seal ring



MH-W21
进出水口密封圈
Seal ring(inlet/outlet)



MH-W22
进出水口密封垫
Gasket(water outlet)



MH-W23
进出水口垫片(拍门)
Gasket(water inlet)



MH-W24
卡箍 Clip



MH-W25
动力空滤器
Engine air filter



MH-W26
水泵消声器(黑)
Muffler(black)



MH-W27
水泵消声器(镀铬)
Pump muffler(chrome)



MH-W28
叶轮 Impeller



MH-W29
涡流壳 Swirling shell



MH-W30
进出水口接头
Joint(water inlet/outlet)



MH-W31
扳手(塑)
Spanner(plastic)



MH-W32
堵塞
Blocker



MH-W33
进水滤网
Water inlet strainer



MH-W34
水泵调速座
Governor seat(pump)



MH-W35
水泵油箱总成
Fuel tank assy



MH-W36
水泵油箱盖(铁)
Fuel tank cover(iron)



MH-W37
水泵油箱盖(塑料)
Fuel tank cover(plastic)



MH-W38
水泵滤网
Pump strainer



MH-W39
出油接口
Fuel control valve



MH-F40
轴承bearing



MH-F41
拉杆弹簧Tie rod spring



MH-F42
调速拉杆
Speed control tie rod



MH-F43
摇臂Rocker arm



MH-F44
定位销
Alignment pins



MH-F45
六角螺母 hex nut



MH-F46
气门油封Valve oil seals



MH-F47
法兰螺栓Flange bolts



MH-F48
法兰螺栓Flange bolts



MH-F49
小脑法兰螺栓
Cerebellar flange bolt



MH-F50
法兰螺母Flange nuts



MH-F51
法兰螺母Flange nuts



MH-F52
法兰螺栓Flange bolts



MH-F53
法兰螺母Flange nuts



MH-F54
法兰螺栓Flange bolts



MH-F55
V型密封圈V-ring



MH-F56
滑套垫片Gasket



MH-F57
滑套垫片Gasket



MH-F58
法兰螺母Flange nuts



MH-F59
法兰螺栓Flange bolts



MH-G01
启动器总成(塑)
Recoil starter assy(plastic)



MH-G02
启动器总成(铁)
Recoil starter assy(iron)



MH-G03
2900启动器总成(铁)
2900Recoil starter assy(iron)



MH-G04
2900启动器总成(塑)
2900Recoil starter assy(plastic)



MH-G05
导风罩 Fan case



MH-G06
6.5HP箱体 6.5HP Crank case



MH-G07
5.5HP箱体 5.5HP Crank case



MH-G08
箱盖(低) Crankcase cover



MH-G09
气缸盖罩总成 Cylinder head cover assy



MH-G10
气缸头 Clinder head



MH-G11
气缸头总成 Cylinder head assy



MH-G12
气门弹簧 Valve spring



MH-G13
进排气门 Intake & exhaust valve



MH-G14
进排气门(白色)Intake & exhaust valve(white)



MH-G15
进排气门弹簧座
Retainer In & Ex valve spring



MH-G16
排气门护帽 Exhaust valve cap



MH-G17
摆杆支架 Plate push rod guide



MH-G18
摆杆支架(尼龙) Plate push rod guide(nylon)



MH-G19
摇臂总成 Rocker arm assy



MH-G20
机油报警器 Oil alert



MH-G21
机油分离器 Oil separator



MH-G22
高压包 High voltage set



MH-G23
连体总成 Connecting rod assy



MH-G24
调速齿轮总成 Governor gear set



MH-G25
调速轴 Governor gear shaft



MH-G26
调速轴卡簧 Clip(governor shaft)



MH-G27
滑套 Governor slider



MH-G28
推杆 Push rod



MH-G29
挺住 Valve lifter

汽油发动机配件


Gasoline Engine Spare Parts

汽油发电机配件

Gasoline generator accessories

汽油水泵配件

Gasoline water pump spare parts

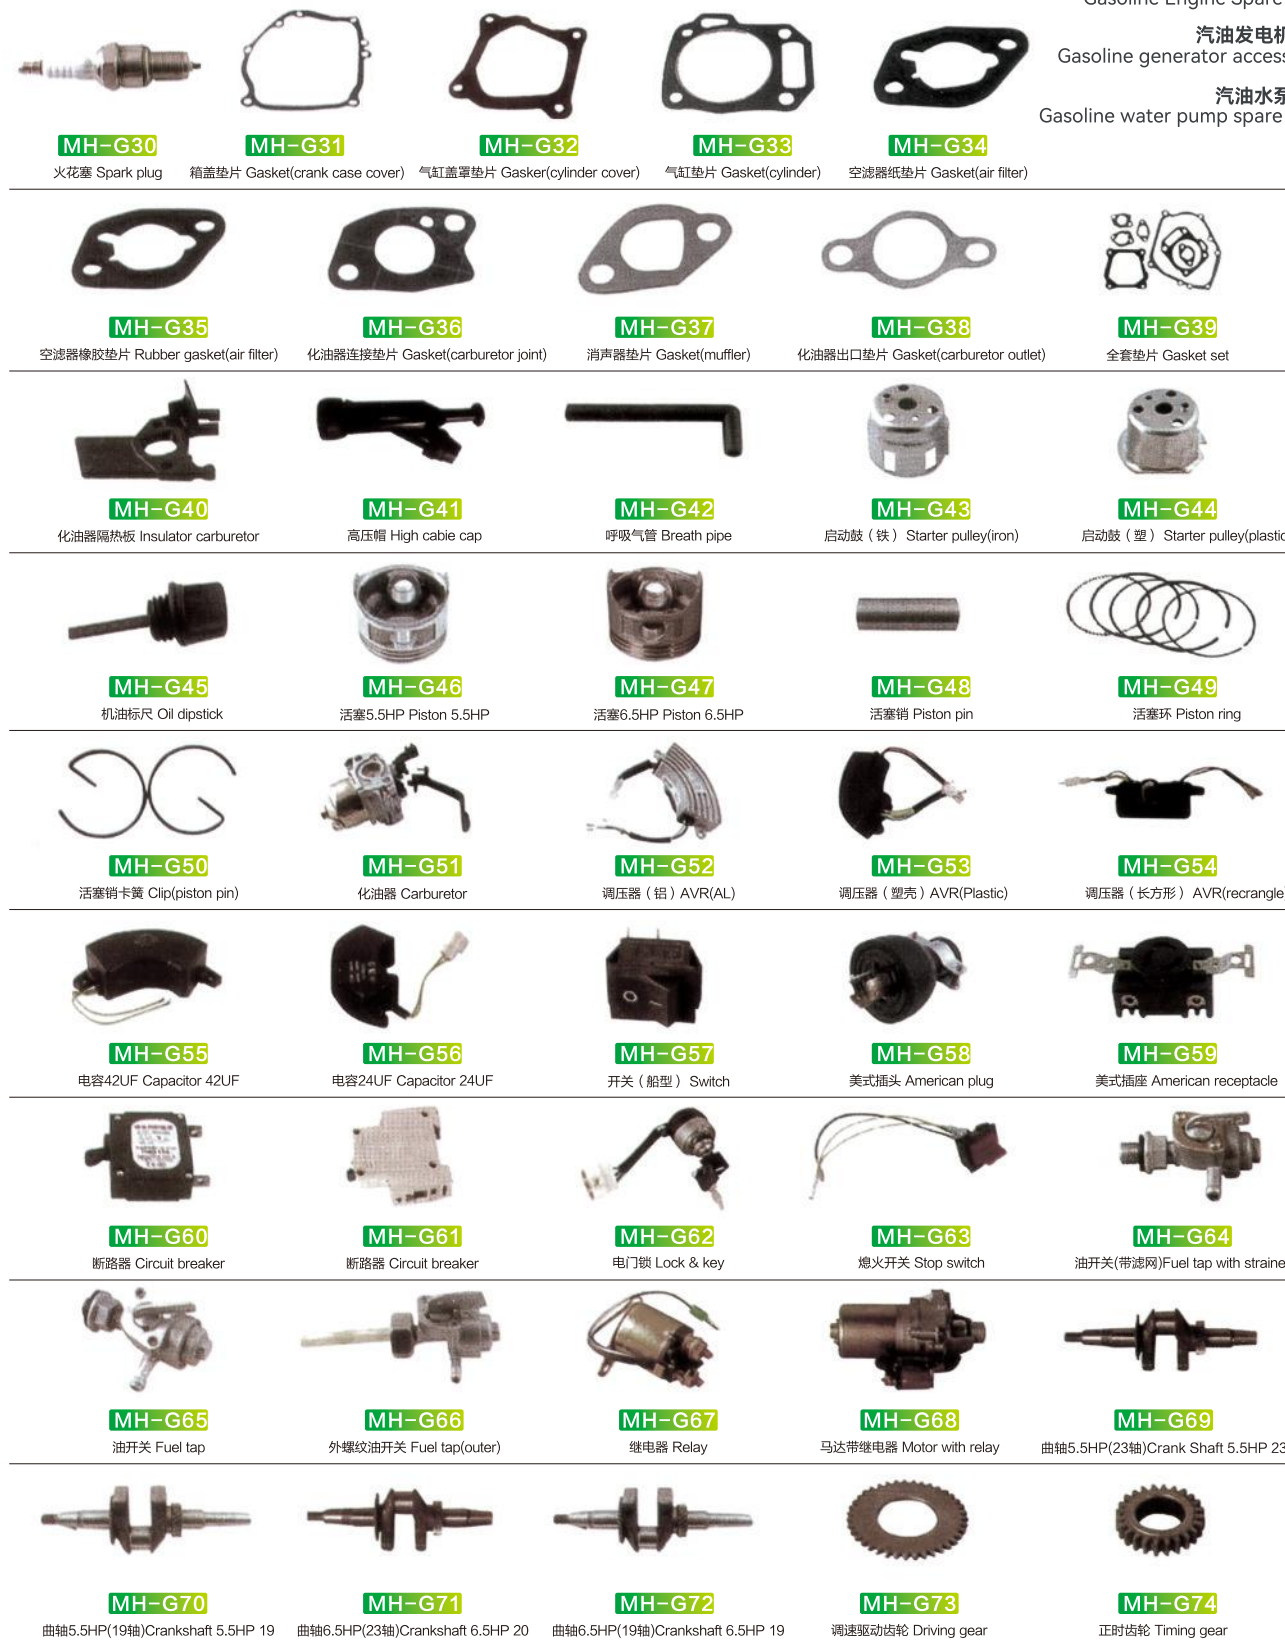
汽油发动机配件

Gasoline Engine Spare Parts

汽油发电机配件

Gasoline generator accessories

汽油水泵配件

Gasoline water pump spare parts



汽油发动机配件


Gasoline Engine Spare Parts

汽油发电机配件

Gasoline generator accessories

汽油水泵配件


Gasoline water pump spare parts

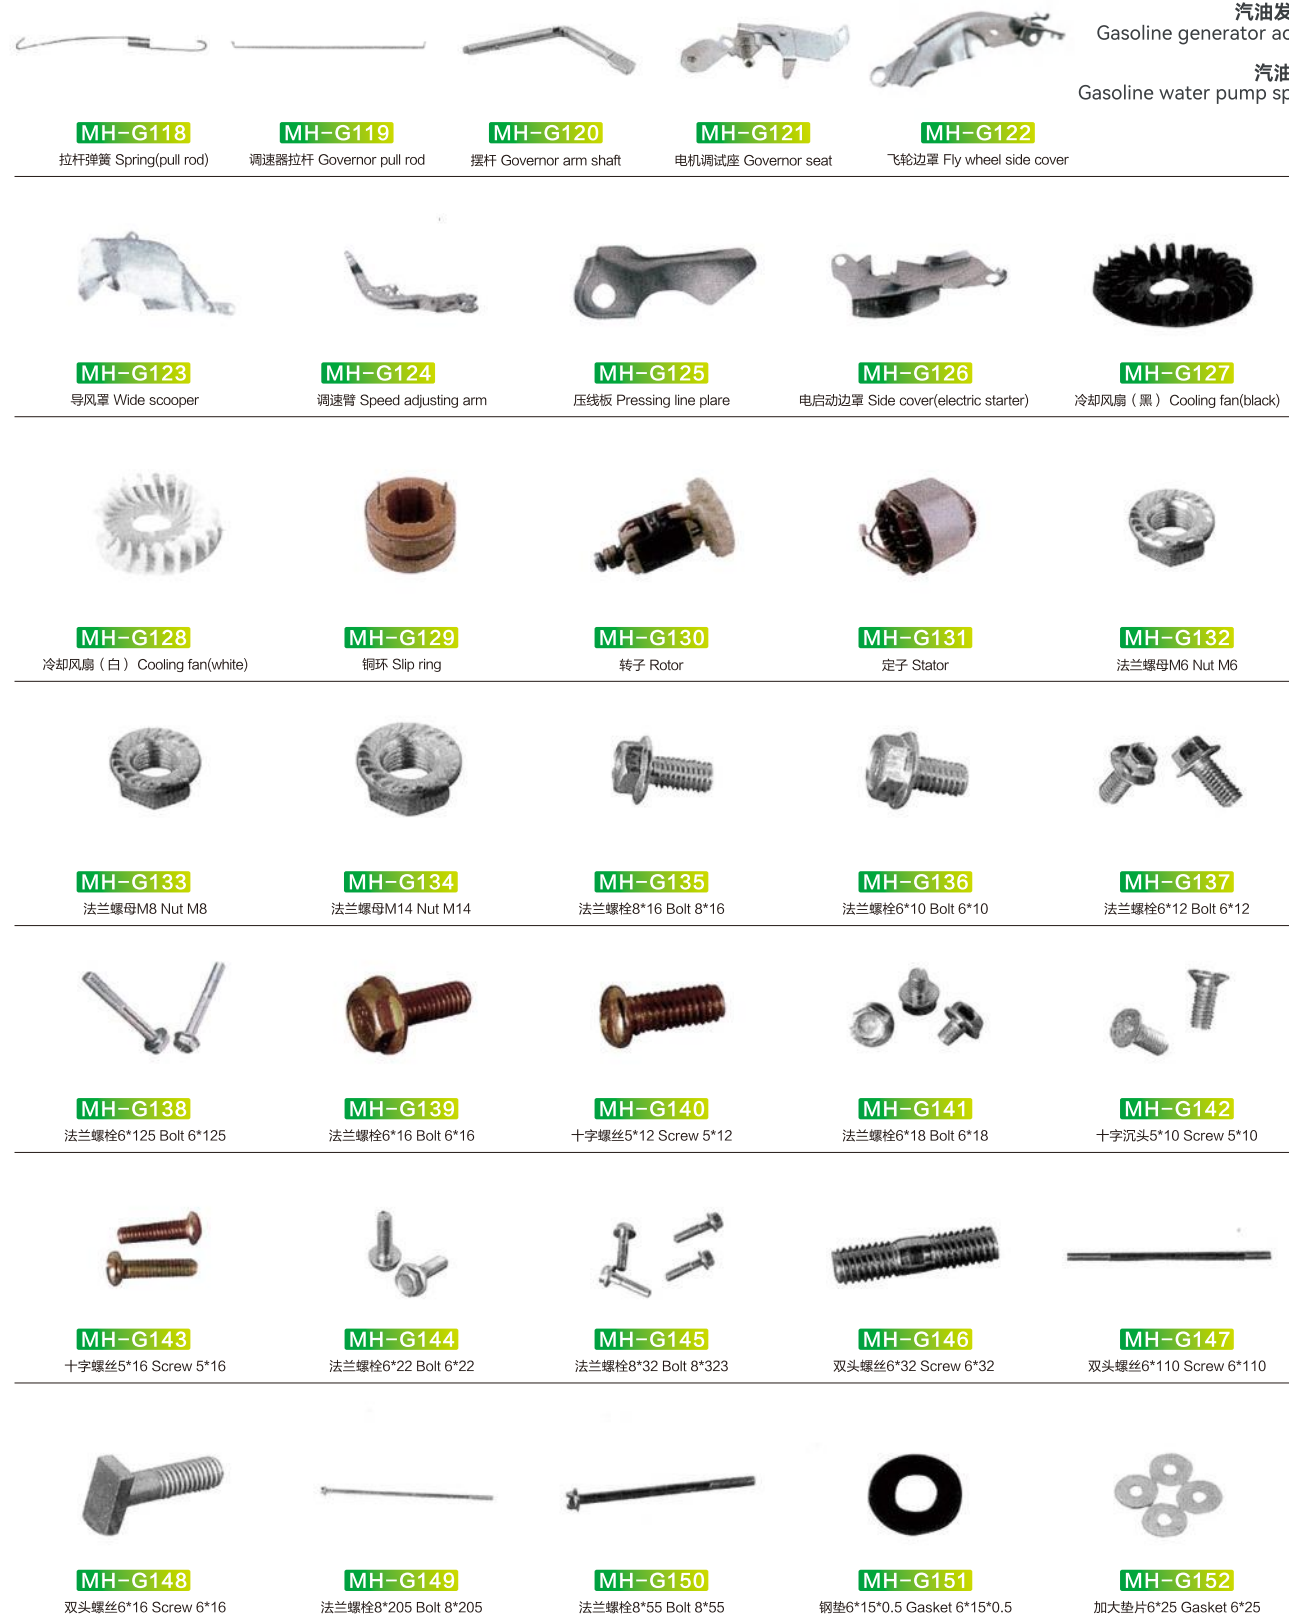
EY20发动机配件

Accessories Of EY20 Engine




割草机配件
Brush Cutter Accessories

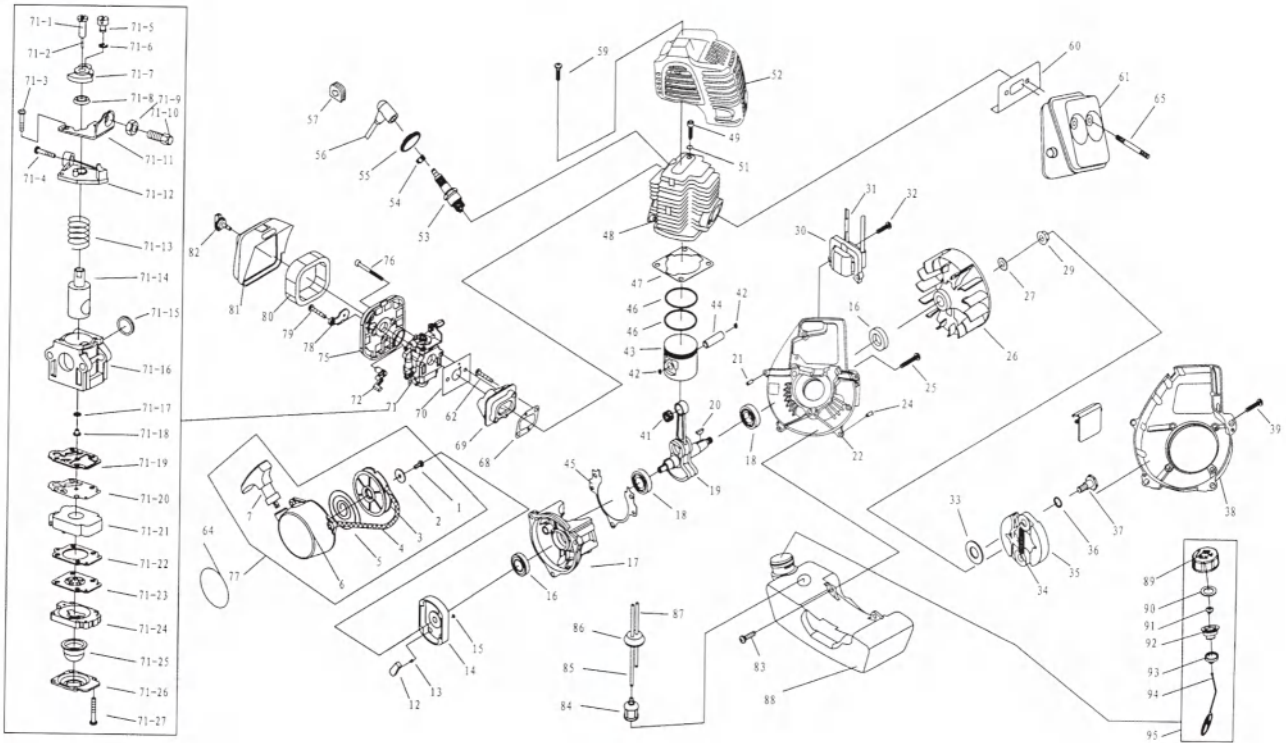


No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.
01	5×12螺丝 Screw M5×12	32	5×20十字Bolt M5×20	65	5×45内六角 Bolt 5×45	71-23	DIAPHRAGM PUMP
02	M5平垫 Paper reel washer	33	M8平垫 Washer M8	68	进气管垫片Gasket	71-24	BODY PURGE
03	线轮 Starter paper reel	34	离合器弹簧 Spring	69	进气管 Admitting pipe	71-25	PUMP PRIMING
04	拉绳 Roper(φ3.5×860)	35	离合器 Expander	70	化油器垫片 Gasket	71-26	COVER PUMP
05	卷簧Recoil Spring	36	8×16×0.6垫片Washer8×16×0.6	71	化油器 Carburetor	71-27	SCREW M3×22
06	启动器罩 Recoil starter body	37	轴位6×21 Screw pin 6×21	71-1	THIMBLE	72	风门把手 Choker handle
07	启动手把 Starter handle	38	边盖 Fan cover	71-2	MALN NEEDLE	75	过滤器内罩 Cleaner inside cover
12	拨爪 Start claw	39	5×20十字Bolt M5×16	71-3	SCREW	76	5×50螺丝 Screw M5×50
13	拨爪弹簧 Start spring	41	Bearing 08112	71-4	SCREW M3×10	77	启动器 Starter
14	拨盘(未组装) Start reel	42	活塞卡簧Ring	71-5	SWIVEL	78	风门挡板 Choker handle
15	拨盘卡簧 Stop ring 4	43	活塞 Piston	71-6		79	SCREW ST4.2×12-F-R
16	油封 Oil-seal 12×22×7	44	活塞销子 Piston Pin	71-7	TURN FRAME	80	海绵 Filter
17	小箱 Crank case	46	活塞环 Piston ring	71-8	AIRPROOF RING	81	外罩 Cleaner outer cover
18	轴承6001 Bearing 6001	47	汽缸垫片 Gasket	71-9	NUT M6	82	空滤器外罩螺丝 Screw
19	曲轴 Crank shaft	48	汽缸 Cylinder	71-10	NUT ADJUSTER	83	5×20十字Screw M5×16
20	半圆键Key 3×5×13	49	5×16内六角 Screw M5×18	71-11	BRACKET	84	油滤器Cleaner cover
21	销子3×8 Pin B4×10	51	M5弹垫 Washer M5	71-12	FIXED BOARD	85	进油管 Fuel Pipe
22	中箱 Crank case	52	缸体罩 Guide cover ass'y	71-13	SPRING	86	油塞 Plug Cap
24	销子3×8 Pin B4×10	53	火花塞 Spark Plug	71-14	COLUMN	87	回油管 Fuel Pipe
25	5×25内六角螺丝 Screw M5×25	54	点火弹簧 Spring	71-15	RING	88	油壶(未安装) Fuel tank
26	飞轮 Magneto rotor comp	55	火花塞帽 Plug cap	71-16	OVERBODY	89	油壶盖(未安装) Fuel tank lid
27	8×16×0.6垫片 Washer 8×16×0.6	56	取消 Cap	71-17	O-RING	90	橡胶垫 Gasket
29	M8法兰螺丝 Nut M8	57	点火线卡 Plug cap	71-18	PINHOLE	91	气阀 Airscoop
30	高压包 Ignition Coil comp	59	5*16十字 Screw M5×20	71-19	GASKET PUMP	92	气阀座 Inside cover
31	高压包连接线 Cord comp	60	消音器垫片 Gasket	71-20	DIAPHRAGM PUMP	93	油壶盖把柄 Casing
		61	消音器 Muffler	71-21	MID-BODY	94	油壶盖网拍 Chain
		62	5×25十字Screw M5×20	71-22	GASKET DIAPHRAGM	95	油壶盖 (安好)Lid assy

背负式分解图

Diagram of knapsack
Power sprayer

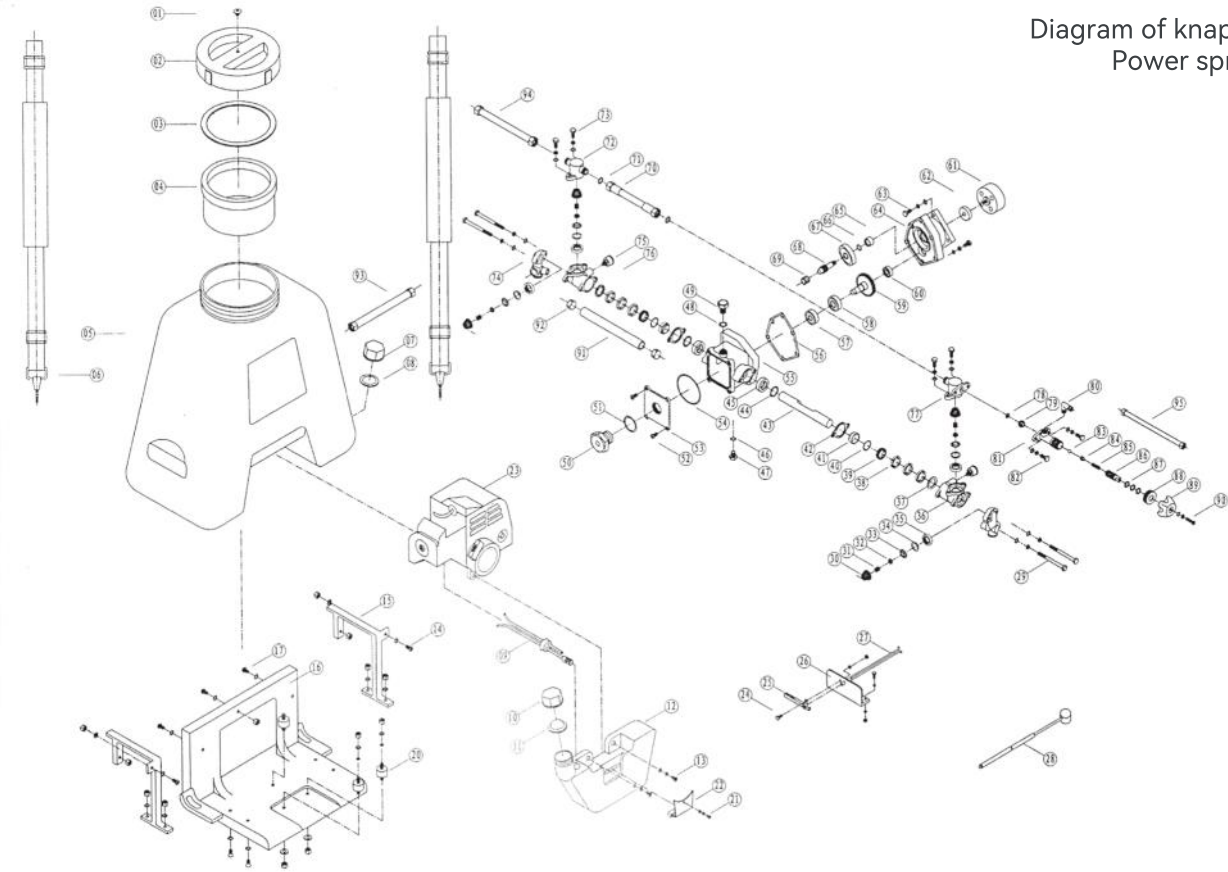

No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.
01	透气塞 ventilating plug	27	停止开关 stopping swith	51	油镜O型圈 oil gauge o-ring	75	黄油杯 grease cup
02	桶盖 tank cover	28	油门拉线 accelerator	52	十字槽头圆头螺钉 cross screw	76	左缸体 left cylinder
03	桶盖油封 oil seal	29	六角螺栓 turret screw	53	箱盖 case cover	77	右排水室 right discharge metal
04	漏网 filter	30	阀体 valve body	54	O型密封圈 o-ring	78	O型密封圈 o-ring
05	桶身 tank	31	阀弹簧 valve sping	55	齿轮箱 gear case	79	调压阀座 Pressure adjusting valve seat
06	背带 belt	32	阀片 valve pad	56	垫片 pad	80	回水接头 overflow union
07	泄水螺帽 draining nut	33	阀座 valve seat	57	深沟球轴承 bearing	81	调压阀体 Pressure adjusting valve metal
08	泄水密封圈 draining cap o-ring	34	阀压盖 valve cover	58	深沟球轴承 bearing	82	六角螺栓 turret screw
09	油管 oil pipe	35	阀紧固套 valve fastening set	59	大齿轮轴 big gear shaft	83	钢球 metal ball
10	油壶盖 oil tank cover	36	右进水室 right suction metal	60	深沟球轴承 bearing	84	回水针 retuning spindle
11	油封 oil seal	37	支承轴 v-packing seat	61	带动套 driving set	85	调压弹簧 pressure adjusting spring
12	油壶 oil tank	38	V形密封圈 v-packing	62	油封 oil seal	86	调压阀杆 pressure adjusting sprindle
13	油壶压紧螺钉 oil tank compacting screw	39	黄油环 grease ring	63	六角螺栓 turret screw	87	O型密封圈 o-ring
14	十字槽头圆头螺钉 cross screw	40	排水室座密封圈 o-ring	64	轴承座 bearing seat	88	压紧螺套 compacting screw
15	支座 packing seat	41	压环 pressure ring	65	轴套 piston set	89	星形手轮 Start handle wheel
16	底座 base seat	42	垫片 pad	66	O型密封圈 o-ring	90	十字槽头圆头螺钉 cross screw
17	十字槽头圆头螺钉 cross screw	43	柱塞 piston	67	深沟球轴承 bearing	91	进室接头 Suction metal connecting hose
20	减震块 absorber	44	O型密封圈 o-ring	68	小齿轮 small gear shaft	92	管夹 hose clamp
21	十字槽头圆头螺钉 cross screw	45	油封oil seat	69	轴承 bearing	93	进水管suction hose
22	油壶固定板 oil tank fixed seat	46	O型密封圈 o-ring	70	排水管件 draining connecting	94	排水管 ourflow hose
23	汽油机 engine	47	放油螺塞 plug drain	71	密封圈 o-ring	95	回水管 overflow hose
24	十字槽头圆头螺钉 cross screw	48	O型密封圈 o-ring	72	左排水室 left discharge metal		
25	油门开关 accelerator switch	49	加油螺塞 oil inflow screw	73	六角螺栓 turret screw		
26	油门开关固定座 accelerator switch fixed seat	50	探油镜 oil gauge	74	进室室 suction metal		

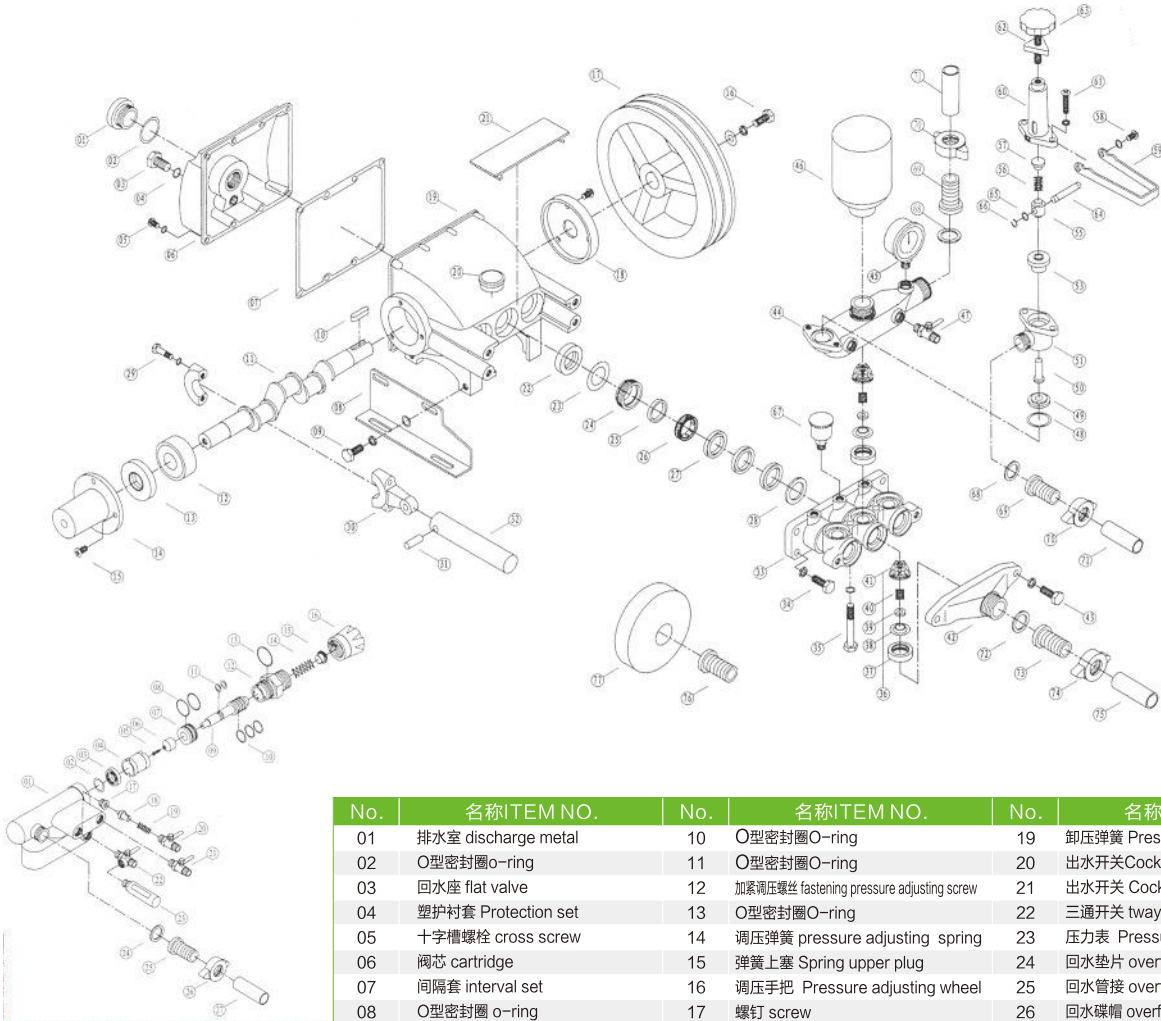


No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.
01	排水室 discharge metal	10	O型密封圈O-ring	19	卸压弹簧 Pressure unloading spring
02	O型密封圈O-ring	11	O型密封圈O-ring	20	出水开关Cock
03	回水座 flat valve	12	加紧调压螺丝 fastening pressure adjusting screw	21	出水开关 Cock
04	塑料衬套 Protection set	13	O型密封圈O-ring	22	三通开关 tway entrance switch
05	十字槽螺栓 cross screw	14	调压弹簧 pressure adjusting spring	23	压力表 Presssure gauge
06	阀芯 cartridge	15	弹簧上塞 Spring upper plug	24	回水垫片 overflow hose washer
07	间隔套 interval set	16	调压手把 Pressure adjusting wheel	25	回水管接 overflow hose core
08	O型密封圈 o-ring	17	螺钉 screw	26	回水蝶帽 overflow hose butterfly cap
09	回水阀杆 returning valve sprindle	18	卸压锥头 Pressure unloading valve	27	回水软管 overflow hose

No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.
01	探油镜 Oil gauge	21	防尘盖 dustproof cover	41	阀体 Valve body	63	调压轮 Adjust pressure wheel
02	油镜O型圈 Oil gauge O-ring	22	柱塞油封 Plunger oil seal	42	进室室 Suction metal	64	横销 Transverse pin
03	放油螺丝 Plug drain	23	挡水环 breakwater ring	43	六角螺栓 Suction metal scrow	65	平垫片 Flat pad
04	O型密封圈 O-ring	24	压盖grand	44	排水室 Discharge metal	66	弹性挡圈 Spring blocking ring
05	箱盖螺钉 Case cover screw	25	黄油迫紧 grease seal	45	压力表 Pressure gauge	67	黄油杯 Grease up
06	曲轴箱盖 Curve shaft case cover	26	黄油环 grease ring	46	空气室 Air chamber	68	回水垫片 Overflow hose washer
07	箱盖垫片 case cover pad	27	V 迫紧 V -Packing	47	出水开关 Cock	69	回水管接 Overflow hose core
08	铁脚 Iron fet	28	迫紧底座 V -Packing seal	48	O型密封圈 O-ring	70	回水蝶帽 Overflow hose butterfly cap
09	六角螺栓 turret screw	29	六角螺栓 screw	49	回水座 Flat valve	71	进水管 Overflow hose
10	平键 flat key	30	连杆 connecting rod	50	回水针 Body overflow spindle	72	回水软管 Overflow hose washer
11	曲轴 curve shaft	31	柱塞销 Plunger pin	51	回水体 Body overflow	73	进水管接 Suction hose core
12	深沟球轴承 bearing	32	柱塞 Plunger	53	回水油封 Oil seal	74	进水管帽 Suction hose butterfly cap
13	曲轴油封 curve shaft oil seal	33	缸体 Cylinder	55	调压滑块 Pressure adjusting slip	75	进水管 Suction hose
14	后轴承盖 bearing cover	34	六角螺栓 screw	56	调压弹簧 Pressure adjusting spring	76	吸水管接口 Suction hose core
15	十字槽盘头螺钉 cross screw	35	六角螺栓 screw	57	弹簧上塞 Spring upper plug	77	滤网 Strainer
16	六角螺栓 turret screw	36	阀门组 valve assy	58	十字槽盘头螺钉 Cross screw	78	NO.48-66 Regulator assy
17	皮带轮 Pulley	37	阀门固套 valve seal	59	回水把手 Handle		
18	前轴承盖bearing cover	38	阀座 valve seat	60	调压套管 Spring box		
19	曲轴箱 curve shaft case(crank case)	39	阀片 valve flat	61	十字槽盘头螺钉 Cross screw		
20	加油盖 oil filler	40	阀弹簧valve spring	62	调压轮 Adjust pressure wheel		

汽油发动机分解图

Diagram of Gasoline Engine

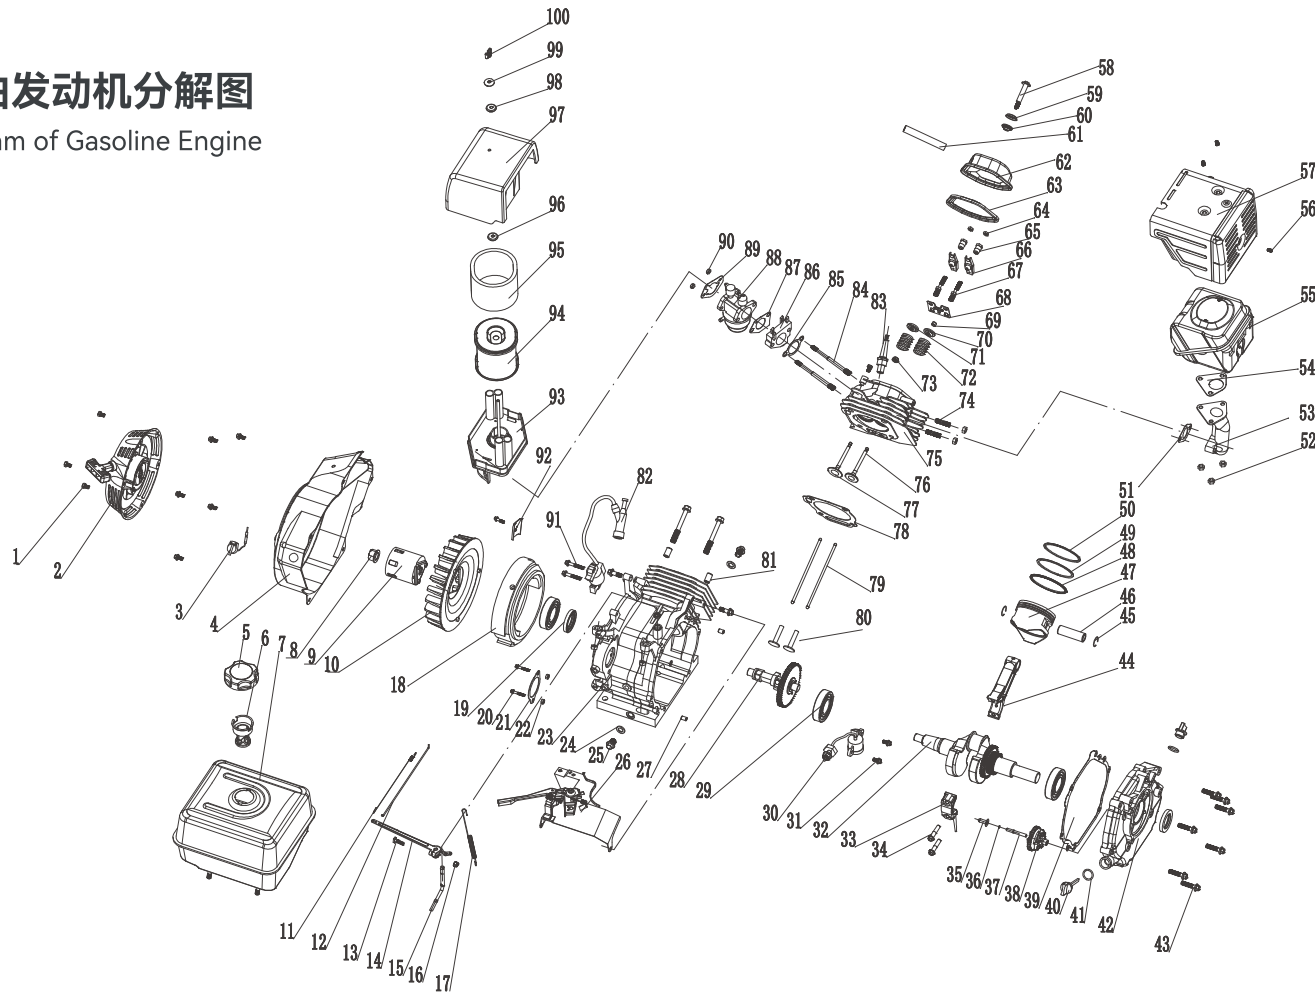

No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.	No.	名称ITEM NO.
1	螺栓M6*8 Bolt M6*8	26	箱体定位销 Locating pin (crankcase)	51	消声器排气管垫片 Muffler exhaust pipe gasket	76	排气门 Exhaust valve
2	拉盘部件 Recoil starter	27	缸盖定位销 locating pin (cylinder cover)	52	螺母 M8Nut M8	77	进气门 Intake valve
3	熄火开关部件 On/off switch	28	凸轮轴部件 Camshaft	53	消声器排气管 Muffler exhaust pipe	78	汽缸垫 Cylinder gasket
4	导风罩部件 Wind scoop	29	轴承6205 Bearing 6205	54	消声器垫片 Muffler gasket	79	推杆 Push rod
5	油箱盖部件 fuel tank cap	30	油位传感器组件 Oil alert	55	消声器部件 Muffler parts	80	挺柱 Tappet
6	滤网部件 Strainer	31	螺栓M6*16 Bolt M6*16	56	螺钉M5*12 Screw M5*12	81	缸盖定位销 Cylinder head locating pin
7	油箱 Fuel tank	32	曲轴轴衬 Crankshaft	57	消声器外罩 Muffler outer cover	82	点火块部件 Ignition Component
8	飞轮螺母M14 Flywheel nut M14	33	连杆盖 Connecting rod cap	58	气缸罩螺栓 Cylinder cover bolt	83	火花塞 Spark plug
9	启动爪 Starter pulley	34	连杆螺栓 Connecting-rod bolt	59	气缸罩螺栓垫片 Cylinder cover bolt gasket	84	化油器螺柱 Carburetor stud
10	风扇 Cooling fan	35	调速轴套 Regulating shaft sleeve	60	气缸罩螺栓密封垫 Cylinder cover bolt gasket	85	化油器隔热板片 Carburetor heat shield gasket
11	调速弹簧 Spring (governor)	36	锰钢垫片 Manganese steel gasket	61	通气管 Breather pipe	86	化油器隔热板 Carburetor heat shield
12	油门拉杆 Governor pull rod	37	调速轴 Regulating shaft	62	气缸盖罩 Cylinder head cover	87	化油器垫片 Carburetor gasket
13	T型螺栓 T-bolt	38	调速齿轮 Governor gear	63	气缸盖罩密封垫 Cylinder head cover gasket	88	化油器 Carburetor
14	调速臂 Governor arm	39	曲轴箱 Crankcase	64	摇臂螺母 Rocker nut	89	空滤器垫片 Air filter gasket
15	角型杠杆 angle form lever	40	机油尺 Oil gauge	65	锁紧螺母 Lock nut	90	螺母 M6Nut M6
16	M6螺母 Nut M6	41	机油尺垫圈 Oil gauge gasket	66	摇臂 Rocker arm	91	螺栓M6*25 Bolt M6*25
17	张紧弹簧 Spring (pull rod)	42	曲轴箱盖 Crankcase cover	67	摇臂螺栓 Rocker arm stud	92	轴承6205 Bearing 6205
18	飞轮部件 Flywheel	43	螺栓M*35 Bolt M*35	68	推杆保持架 Push rod holder	93	空滤器底壳部件 Air filter bottom shell parts
19	曲轴油封部件 Crankshaft oil seal	44	连杆 Connecting rod	69	调节帽 Adjusting cap	94	滤芯 filter parts
20	M6*32螺栓 Bolt M6*32	45	活塞销卡簧 Piston pin clip	70	排气门弹簧座 Exhaust valve spring seat	95	空滤器密封圈 Air filter seal ring
21	电机盖板 Motor cover	46	活塞销 Piston pin	71	进气门弹簧座 Intake valve spring seat	96	空滤器防震件 Air filter shockproof part
22	T型螺栓法兰螺母 M6T-bolt & flange nut M6	47	活塞 Piston	72	弹簧座 spring seat	97	空滤器盖部件 Air filter cover parts
23	曲轴箱 Crankcase	48	油环衬套 Oil ring sleeve	73	气门导管油封 Valve guide oil seal	98	空滤器橡胶防震密封件 Air filter shockproof seal part
24	放油螺栓垫圈 Gasket (oil drain plug)	49	活塞环1 Piston ring 1	74	双头螺栓 Stud	99	空滤器盖防震密封外垫片 Air filter cover shockproof seal outer gasket
25	放油螺栓 Oil drain plug	50	活塞环2 Piston ring 2	75	缸头 Cylinder head	100	蝶形螺母 Butterfly shape nut

NOTE: